


### Indoor Lighting

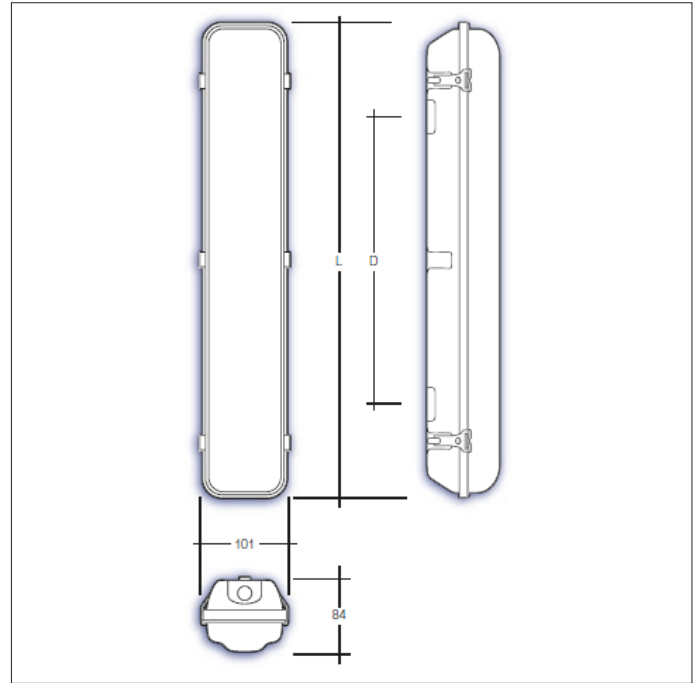

### Key Features

- IP66 suitable for internal environments
- Impact rating of IK08
- Efficacy of up to 160lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 410lm
- Not suitable for wall mounted external environments

### Options

- For DALI dimmable suffix: **/DIM**
- For switch dimmable suffix: **/SDIM**
- For Casambi enabled suffix: **/CAS**
- For wireless DALI dimmable suffix: **/WD**
- For Microwave sensor suffix: **/MW**
- For PIR sensor suffix: **/SEN**
- For 3hr self-contained emergency suffix: **/EMR**
- For 3hr self-test emergency suffix: **/ST**
- For DALI addressable emergency suffix: **/EMP**
- For wireless DALI addressable emergency suffix: **/WAE**

i.e. **WPZ/5/4841/4/EMR**

WPZ, 1575mm, 31W, 4841lm, 4000K, 3hr emergency

Part No.	Lm	W	Lm/W	L	D	Weight
<b>WPZ/4/2422/4</b>	2422	16	150	1285	800	2.1kg
<b>WPZ/4/3791/4</b>	3791	25	150	1285	800	2.1kg
<b>WPZ/4/5058/4</b>	5058	34	145	1285	800	2.1kg
<b>WPZ/4/6184/4</b>	6184	45	136	1285	800	2.1kg
<b>WPZ/5/3117/4</b>	3117	19	160	1575	1100	2.5kg
<b>WPZ/5/4841/4</b>	4841	31	156	1575	1100	2.5kg
<b>WPZ/5/6438/4</b>	6438	43	149	1575	1100	2.5kg
<b>WPZ/5/8010/4</b>	8010	56	142	1575	1100	2.5kg

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

