



Outdoor Lighting

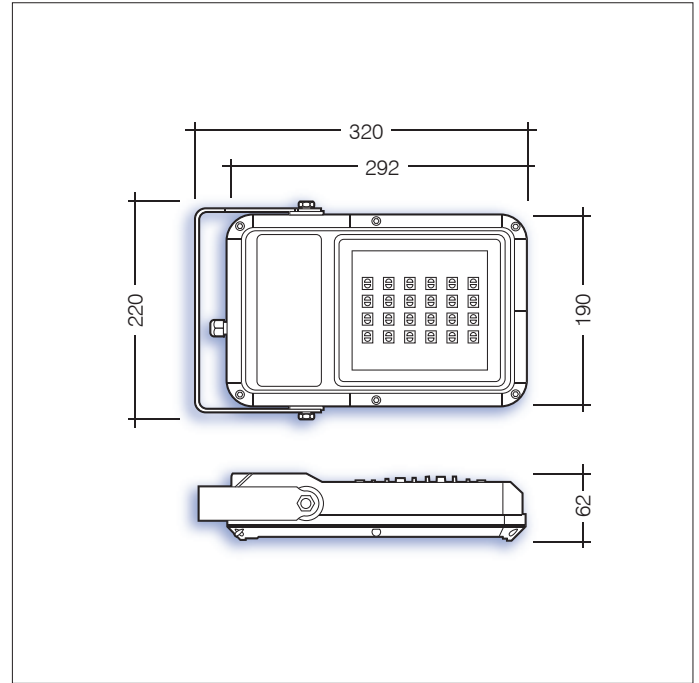

### Key Features

- IP66 suitable for external environments
- Impact rating of IK10
- Efficacy of up to 119lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Various optics available

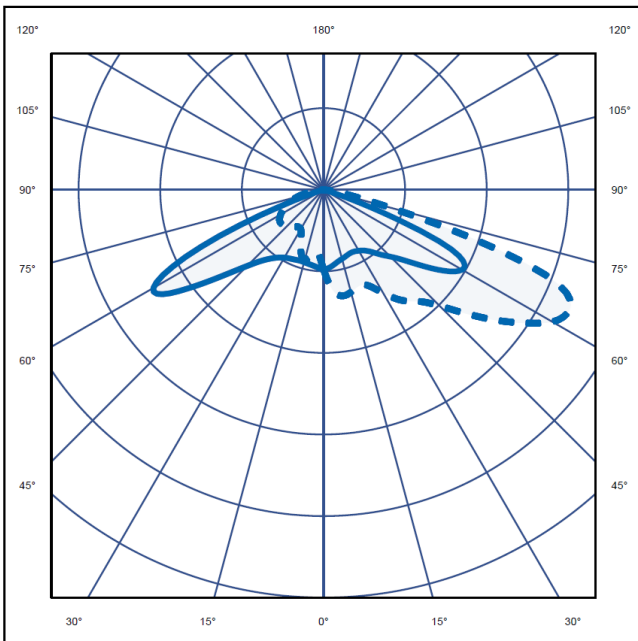

### L8 Forward Flood Lens

Part No.	Lm	W	CRI	Surge Protection
COR/L8/3600/4	3648	38	80	6kV
COR/L8/4900/4	4867	53	80	6kV
COR/L8/6700/4	6705	79	80	6kV

### L2 Wide Flood Lens

Part No.	Lm	W	CRI	Surge Protection
COR/L2/3200/4	3226	38	80	6kV
COR/L2/4300/4	4283	53	80	6kV
COR/L2/5800/4	5785	79	80	6kV

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)