


Indoor Lighting

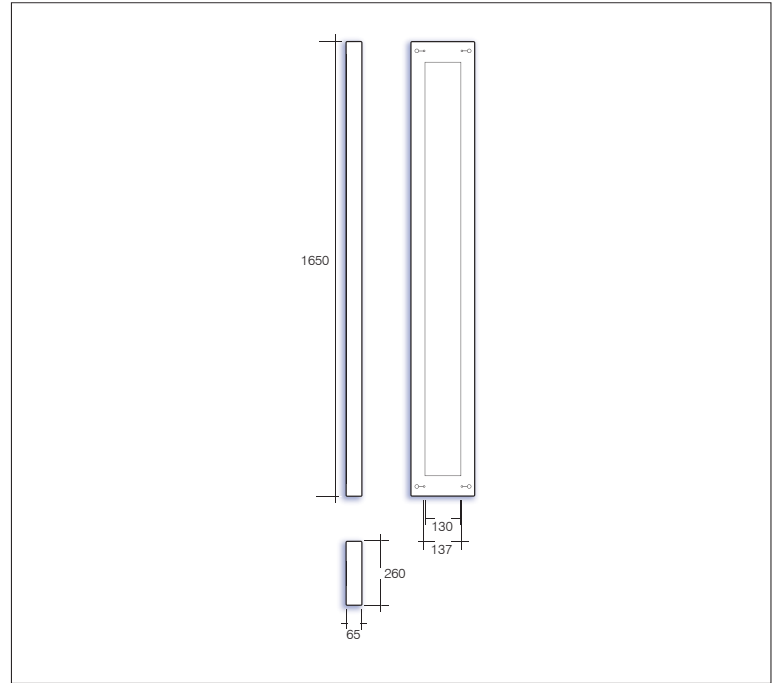

Key Features

- IP20 suitable for indoor environments
- Impact rating of IK06
- Efficacy of up to 135lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 334 lm

Options

- Linear inter-connecting option suffix **/LIN**
- For DALI Dimmable suffix **/DIM**
- For self-contained 3hr emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For DALI em-pro 3hr emergency suffix **/EMP**

i.e. **LUC/5496/4/DIM/EMP =**

Lucie LED Direct/In-direct, suspended luminaire, 5496lm, 4000k, DALI Dimmable c/w DALI Em-Pro 3hr emergency

CRI > 80 supplied as standard, CRI > 90 available on request

Part No.	W	Lm	lm/W	CCT
LUC/3225/4	23	3225	135	4000k
LUC/5496/4	42	5496	129	4000k
LUC/7630/4	62	7630	122	4000k

For more information, please contact Sales@ldl.lighting

