



Indoor Lighting

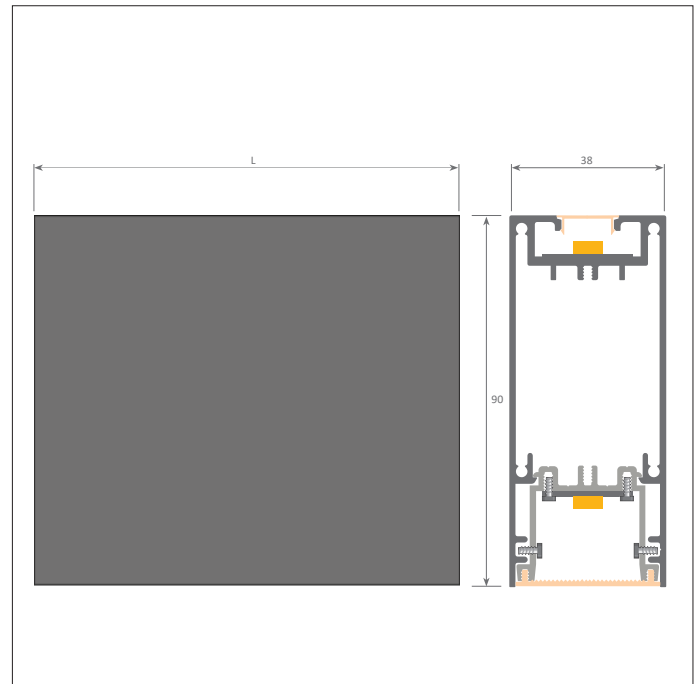

Key Features

- IP20
- Impact rating of IK06
- Efficacy of up to 99lm/W
- Nominal life-time of >100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 262 lm



Options

- For black finish suffix **/BLK**
- For grey finish suffix **/GRY**
- For white finish suffix **/WHI**
- For DALI dimmable suffix **/DIM**
- For Casambi enabled **/CAS**
- For 3hr integral emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For DALI addressable emergency suffix **/EMP**

i.e. **AN/S/11/2768/4/GRY/EMR =**
Anna LED, suspended/surface, 1130mm, 2768lm, 29W, 4000K, grey finish c/w 3hr emergency.

4000K as standard, 3000K supplied on request.
CRI > 80 as standard, CRI > 90 supplied on request.

Part No.	Lm	W	Lm/W	L (mm)
AN/11/919/4	919	9	98	1130
AN/11/1742/4	1742	19	91	1130
AN/11/2768/4	2768	29	95	1130
AN/14/1138/4	1138	11	98	1410
AN/14/2244/4	2244	23	94	1410
AN/14/3427/4	3427	36	94	1410
AN/16/1379/4	1379	14	99	1690
AN/16/2719/4	2719	28	95	1690
AN/16/4151/4	4151	43	95	1690

For more information, please contact Sales@ldl.lighting

Accessories

- Suspended / surface end cap **AN/ECS**
- Wire suspension kit (2m) **AN/WIRE**
- Wall bracket **AN/WALL**
- Coupler **AN/CPLR**

