


Dominique S

Surface Mounted

Innovation.
Collaboration.
Illumination.



Indoor Lighting

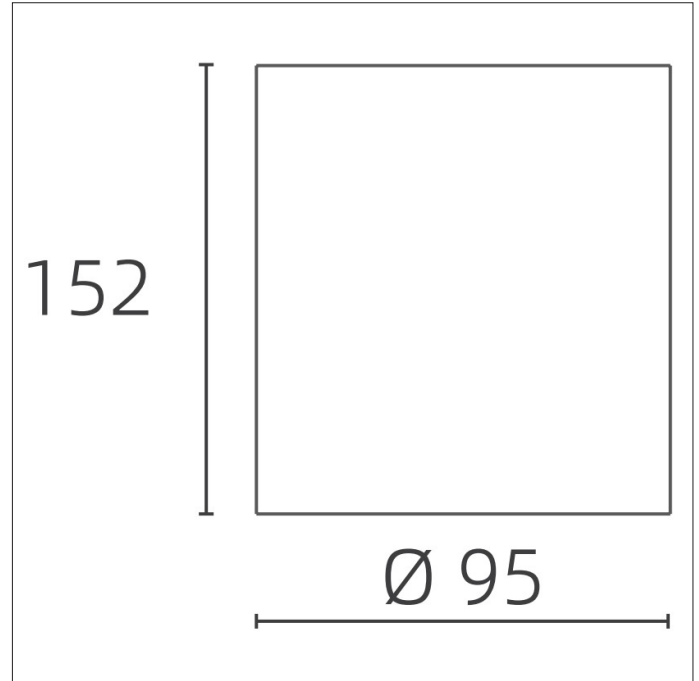

Key Features

- IP20 suitable for internal environments
- Nominal life-time of 50,000 h (L80/B10)
- Impact rating of IK05
- Efficacy of up to 110lm/W
- Various colour temperatures are available
- Colour stability with 3 step MacAdam

Options

- For Black finish suffix: /BLK
- For White finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For 3hr self-contained emergency suffix: /EMR
- For 3hr self-contained DALI emergency suffix: /EMP
- For 3hr self-contained monitor self-test emergency suffix: /MON

i.e. **DOM/S/1263/4/60D/DIM/EMR** = Dominique S surface downlighter, 11W, 1263 lumens, 4000K, 60D, DALI dimmable c/w 3hr self-contained emergency

CRI 80 as standard, CRI 90 available on request.

Part No. (3000K)	Lm	W	lm/W
DOM/S/1160/20D/3	1160	11	101
DOM/S/1758/20D/3	1758	20	88
DOM/S/1183/40D/3	1183	11	103
DOM/S/1756/40D/3	1756	20	88
DOM/S/1200/60D/3	1200	11	105
DOM/S/1780/60D/3	1780	20	89

Part No. (4000K)	Lm	W	lm/W
DOM/S/1221/20D/4	1221	11	107
DOM/S/1851/20D/4	1851	20	92
DOM/S/1246/40D/4	1246	11	109
DOM/S/1848/40D/4	1848	20	92
DOM/S/1263/60D/4	1263	11	110
DOM/S/1874/60D/4	1874	20	94

For more information, please contact Sales@ldl.lighting

Dominique S


Surface Mounted

Innovation.
Collaboration.
Illumination.




Indoor Lighting

20° Optic:

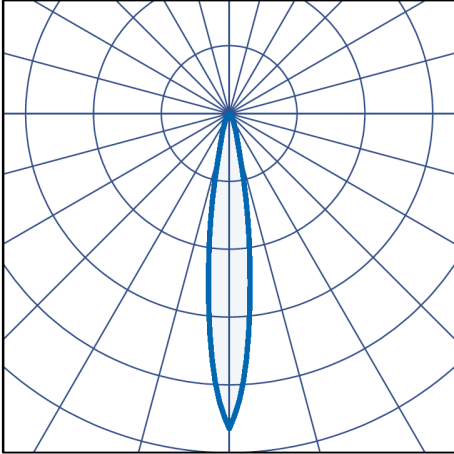

40° Optic:

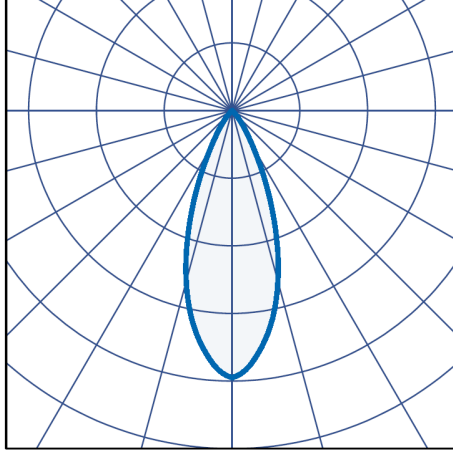

60° Optic:

