


Indoor Lighting

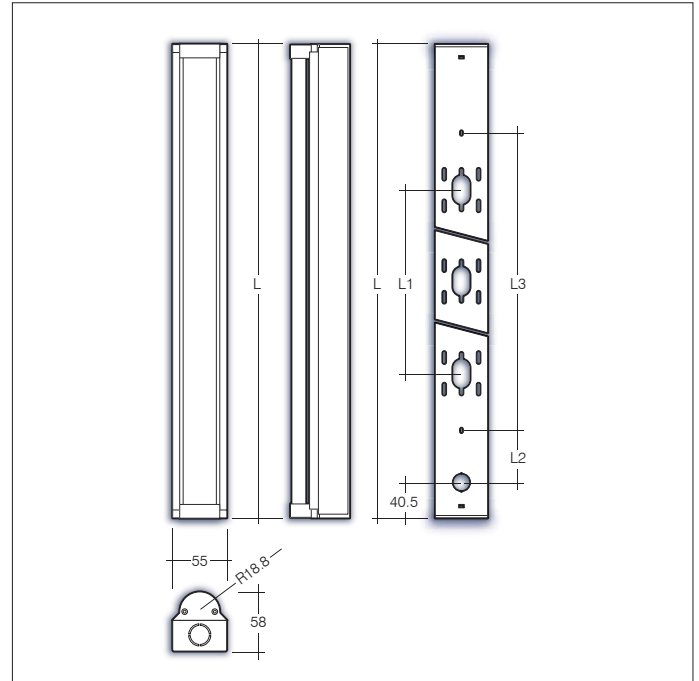

Key Features

- IP40 suitable for indoor environments
- Impact rating of IK06
- Efficacy of up to 144lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 315 lm

Options

- 4000K as standard for 3000K suffix /3
- For DALI dimmable suffix /DIM
- For 3hr self-contained emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr self-contained DALI emergency suffix /EMP

i.e. **BAN/5/3431/4/DIM/EMR =**

Banda 5ft batten, 3431 lumens, 4000K, Dali dimmable c/w 3hr self-contained emergency

Part No.	W	Lm	Lm/W	CCT	Weight
BAN/4/2084/84	14	2084	144	4000	1kg
BAN/4/2745/84	19	2745	141	4000	2kg
BAN/4/3392/84	24	3392	138	4000	2kg
BAN/5/3431/84	26	3431	131	4000	1.5kg
BAN/5/4239/84	33	4239	128	4000	1.5kg
BAN/5/5810/84	47	5810	123	4000	1.5kg

For more information, please contact Sales@ldl.lighting

Fixings (mm)	L	L1	L2	L3
1200mm	1200	610	800	159.5
1500mm	1500	610	840	289.5

