


Indoor Lighting

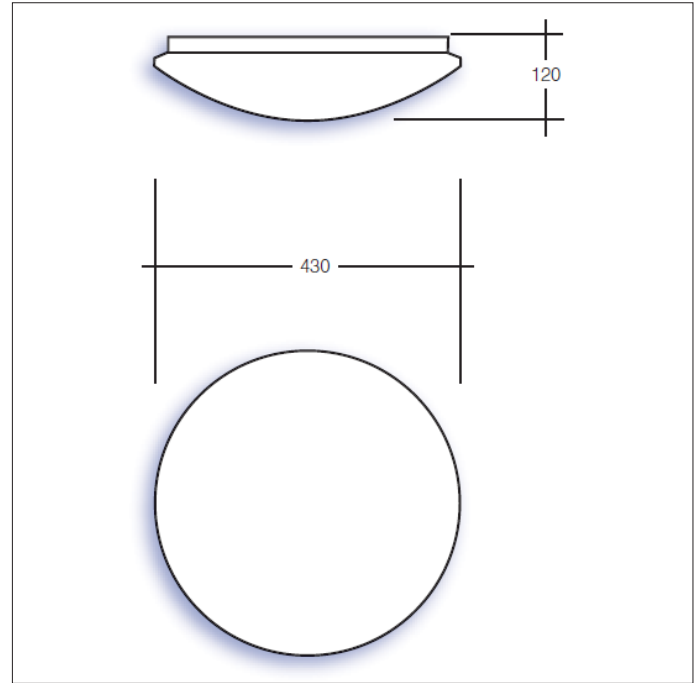

### Key features

- IP20 suitable for internal environments
- Impact rating of IK06
- TP(a) fire rated
- CRI >80
- Efficacy of up to 131lm/W
- Nominal life-time of >72,000 hr (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 420 lm

### Options

- For DALI dimmable suffix /DIM
- For Casambi enabled suffix /CAS
- For wireless dimmable system suffix /WD
- For 3 hr self-contained emergency suffix /EMR
- For self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e.: **ZMP/3060/4/CAS/ST** =  
ZMP, 3060 lumens, 23W, 4000K, Casambi enabled,  
c/w self-test emergency

Part No.	Lm	W	lm/W	CCT
ZMP/2160/3	2163	18	124	3000K
ZMP/2270/4	2269	18	130	4000K
ZMP/2910/3	2913	23	125	3000K
ZMP/3060/4	3060	23	131	4000K
ZMP/3600/3	3601	29	124	3000K
ZMP/3790/4	3791	30	130	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

### Sensor Options

- On-off, no daylight control suffix /F1
- On-off, with daylight control suffix /F2
- Corridor function, no daylight control suffix /F3
- Corridor function, with daylight control suffix /F4
- Dimm to off, no daylight control suffix /F5
- Dimm to off, with daylight control suffix /F6

