


# Rita Small

## Spotlight

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

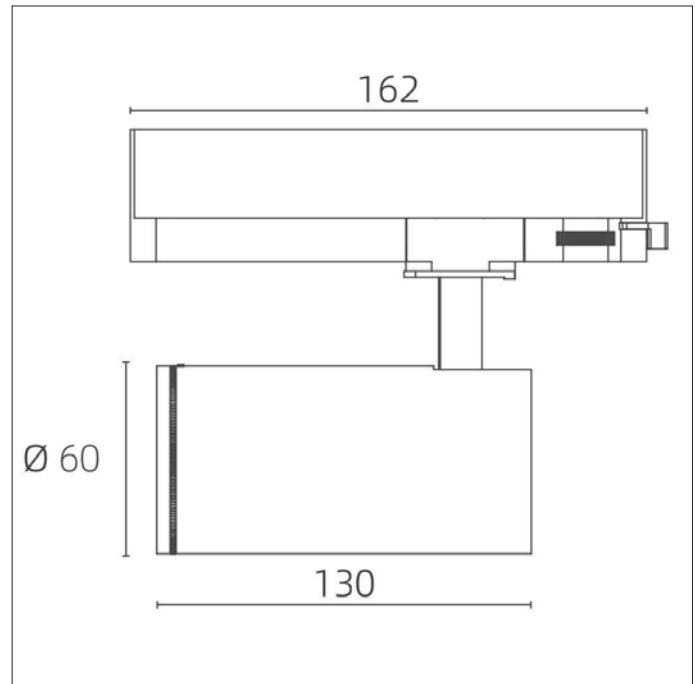

### Key features

- Adjustable track mounted spotlight (20° - 50°)
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 117lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam

### Options

- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF


i.e.: RITA/S/1349/4/50D/BLK/CAS = Rita Small, 1349lm, 4000K, 50D reflector, Black, Casambi

CRI 80 as standard, CRI 90 available on request.


Part No. (3000K)	Lm	W	Lm/W
RIT/S/1228/20D/3	1228	11	111
RIT/S/1597/20D/3	1597	15	105
RIT/S/1861/20D/3	1861	20	93
RIT/S/1295/50D/3	1295	11	110
RIT/S/1681/50D/3	1681	15	104
RIT/S/1960/50D/3	1960	20	95
Part No. (4000K)	Lm	W	Lm/W
RIT/S/1280/20D/4	1280	11	116
RIT/S/1664/20D/4	1664	15	110
RIT/S/1939/20D/4	1939	20	96
RIT/S/1349/50D/4	1349	11	117
RIT/S/1752/50D/4	1752	15	110
RIT/S/2042/50D/4	2042	20	101

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)


20° Optic:



35° Optic:



50° Optic:




# Rita Medium

## Spotlight

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

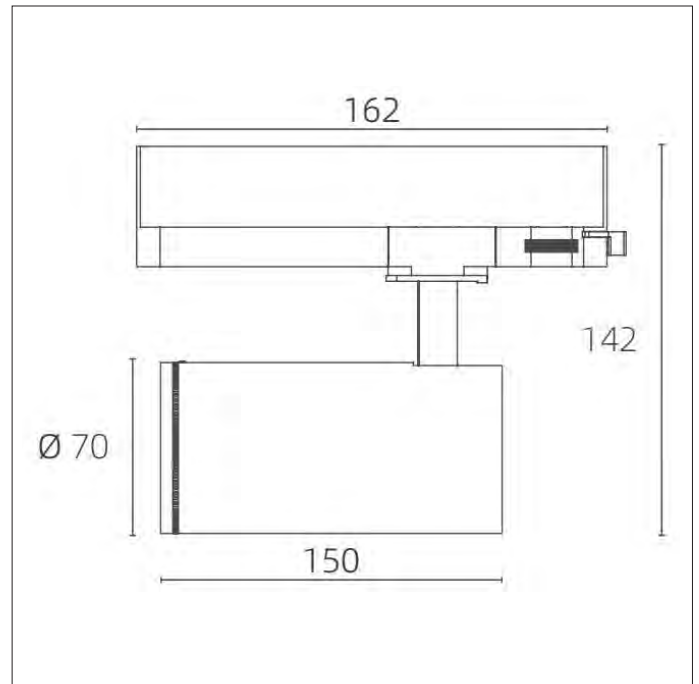

### Key features

- Adjustable track mounted spotlight (20° - 50°)
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 136lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam

### Options

- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF


i.e.: RITA/M/1496/4/50D/BLK/CAS = Rita Medium, 1496lm, 4000K, 50D reflector, Black, Casambi

CRI 80 as standard, CRI 90 available on request.


Part No. (3000K)	Lm	W	Lm/W
RIT/M/1368/20D/3	1368	11	124
RIT/M/2244/20D/3	2244	19	118
RIT/M/2963/20D/3	2963	27	109
RIT/M/1436/50D/3	1436	11	130
RIT/M/2352/50D/3	2352	19	123
RIT/M/3106/50D/3	3106	27	115
Part No. (4000K)	Lm	W	Lm/W
RIT/M/1426/20D/4	1426	11	129
RIT/M/2338/20D/4	2338	19	123
RIT/M/3087/20D/4	3087	27	114
RIT/M/1496/50D/4	1496	11	136
RIT/M/2450/50D/4	2450	19	128
RIT/M/3236/50D/4	3236	27	119

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)


20° Optic:



35° Optic:



50° Optic:




# Rita Large

## Spotlight

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

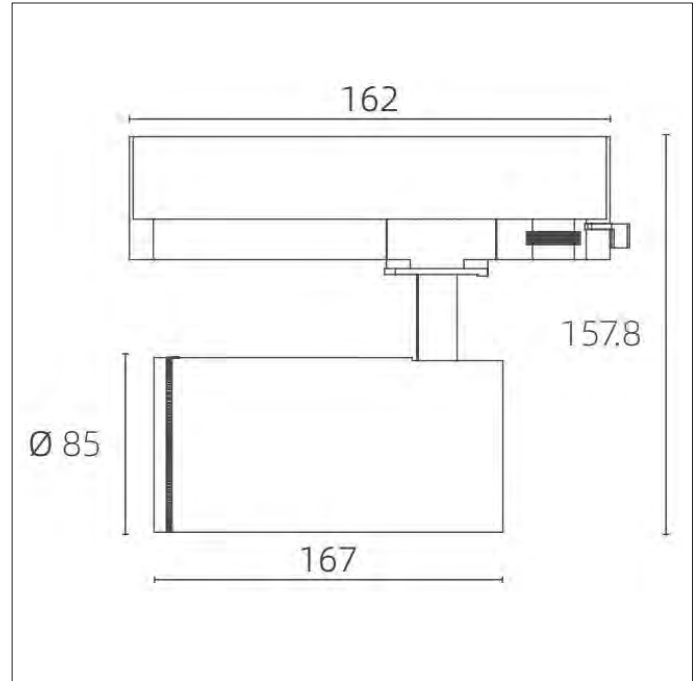

### Key features

- Adjustable track mounted spotlight (20° - 50°)
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 137lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam

### Options

- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF


i.e.: RITA/L/1511/4/50D/BLK/CAS = Rita Large, 1511lm, 4000K, 50D reflector, Black, Casambi

CRI 80 as standard, CRI 90 available on request.


Part No. (3000K)	Lm	W	Lm/W
RIT/L/1382/20D/3	1382	11	125
RIT/L/2266/20D/3	2266	19	119
RIT/L/3032/20D/3	3032	27	112
RIT/L/1450/50D/3	1450	11	131
RIT/L/2376/50D/3	2376	19	125
RIT/L/3177/50D/3	3177	27	117
Part No. (4000K)	Lm	W	Lm/W
RIT/L/1440/20D/4	1440	11	130
RIT/L/2361/20D/4	2361	19	124
RIT/L/3159/20D/4	3159	27	117
RIT/L/1511/50D/4	1511	11	137
RIT/L/2475/50D/4	2475	19	130
RIT/L/3310/50D/4	3310	27	122

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

20° Optic:



35° Optic:



50° Optic:

