


# Millie Modular

## Modular Optics

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

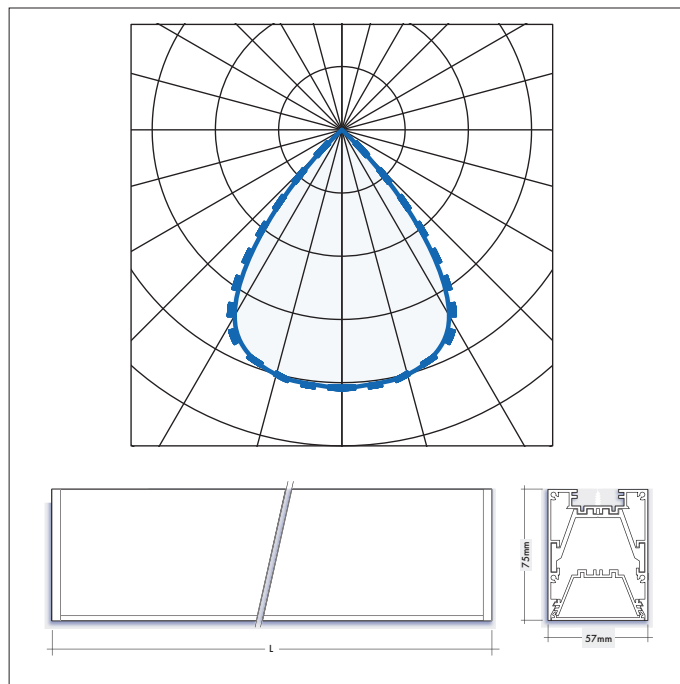

### Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE

i.e.: Millie, Surface/Suspended, 1680mm, modular optics, 4296 lumens, 31W, 4000K, black RAL 9005 finish, DALI dimmable = **MIL/S/16/MOD/4300/4/BLK/DIM**

### Accessories

- Suspended / Surface end cap MIL/ECS
- Wire suspension kit (2m) MIL/WIRE
- Wall mounting bracket MIL/WALL
- Coupler MIL/CPLR

### Fitting Lengths (mm)



### Part No.

Lm

W

Lm/W

MIL/S/11/MOD/2326/4	2330	18	129
MIL/S/11/MOD/2860/4	2864	22	130
MIL/S/14/MOD/2910/4	2908	22	132
MIL/S/14/MOD/3580/4	3580	26	138
MIL/S/16/MOD/3490/4	3489	25	140
MIL/S/16/MOD/4300/4	4296	31	139

### Key feature

- Low glare UGR <19
- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 132lm/W
- Nominal life-time of 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- For Suspended version, Direct Indirect is available, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting) for more info