


Indoor Lighting

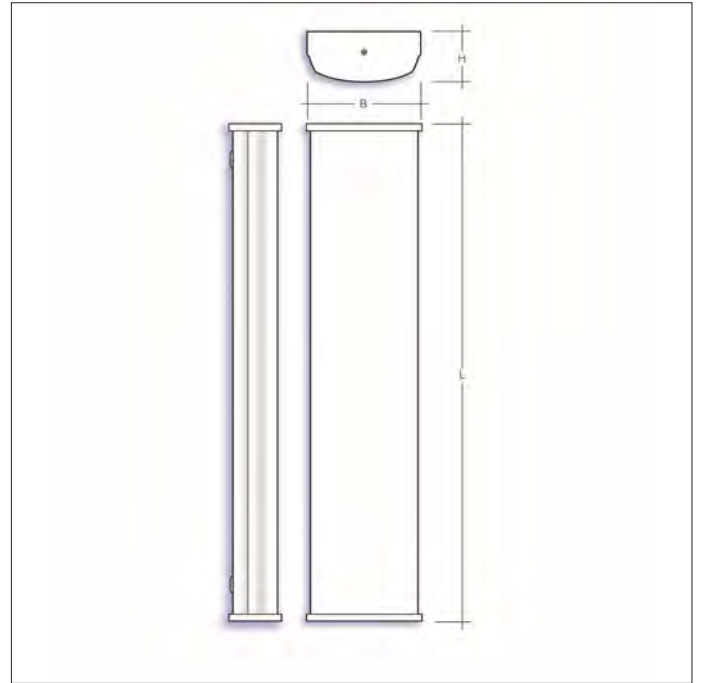

Key features

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 159lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 445 lm

Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For 3hr emergency suffix: /EMR
- For self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP

i.e. **ALEX/5/3478/4/DIM/EMR** =
ALEX LED surface luminaire, 3478lm, 23W, 4000K,
Dali Dimmable c/w 3hr emergency.

| Part No. | W | Lm | Lm/W | L | H | B |
|---------------|----|------|------|------|----|-----|
| ALEX/4/1339/4 | 9 | 1339 | 144 | 1200 | 70 | 170 |
| ALEX/4/2672/4 | 19 | 2672 | 140 | 1200 | 70 | 170 |
| ALEX/4/4006/4 | 29 | 4006 | 138 | 1200 | 70 | 170 |
| ALEX/4/5124/4 | 39 | 5124 | 130 | 1200 | 70 | 170 |
| ALEX/4/6343/4 | 49 | 6343 | 127 | 1200 | 70 | 170 |
| ALEX/5/1851/4 | 11 | 1851 | 159 | 1480 | 70 | 170 |
| ALEX/5/3478/4 | 23 | 3478 | 146 | 1480 | 70 | 170 |
| ALEX/5/5198/4 | 36 | 5198 | 143 | 1480 | 70 | 170 |
| ALEX/5/6625/4 | 49 | 6625 | 135 | 1480 | 70 | 170 |
| ALEX/5/8164/4 | 62 | 8164 | 131 | 1480 | 70 | 170 |

