


LED Bollard

Bollards

Innovation.
Collaboration.
Illumination.



External Lighting

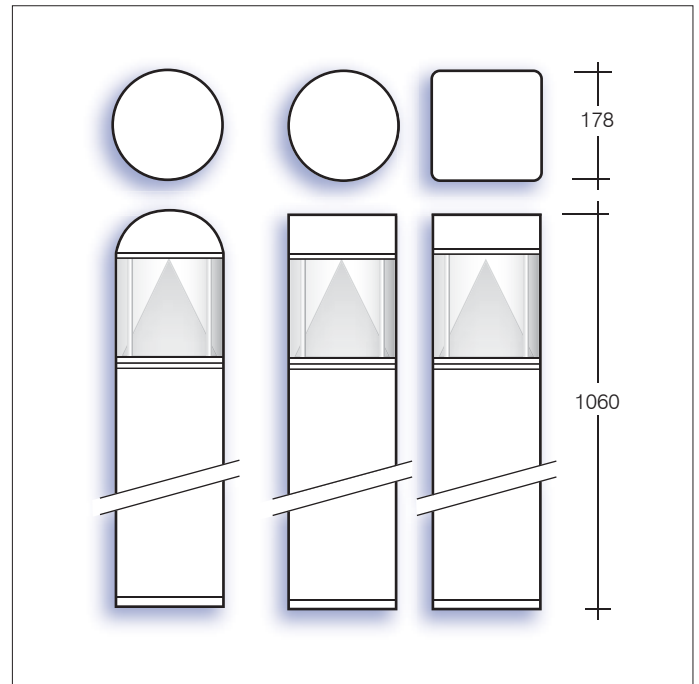

Overview

There are four variations within the range of LED bollards with various finishes and shapes to give maximum flexibility.


All the bollards are suitable for flange mounting and are supplied as standard with a 200mm anchor bolt mounting kit, an accessory is available when a root mounted option is required.

The range incorporates a stainless steel bollard formed from 316 grade stainless steel, the black powder coated bollards are manufactured from extruded aluminium and all the bollards are supplied as standard with anti-tamper screws and an internal ballast tray for easy maintenance.

The purposely designed cone reflector and LED array are housed behind a clear polycarbonate lens giving excellent performance and aesthetics.

Accessories

- Root Attachment **BOLRM**

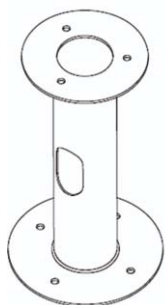

Part No.	W	Lm	CCT	CRI	Finish	Head
BOL/LED/1	15	1631	5000k	83	Black	Dome
BOL/LED/2	15	1641	5000k	83	Black	Flat
BOL/LED/3	15	1641	5000k	83	Black	Flat-Square
BOL/LED/4	15	1631	5000k	83	Stainless Steel	Dome

More options available, see www.LDL.lighting

Key Features

- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 105lm/W
- Nominal life-time of 50,000 h (L70/B10)
- 115° optic