


Horus

Bollards

Innovation.
Collaboration.
Illumination.



External Lighting

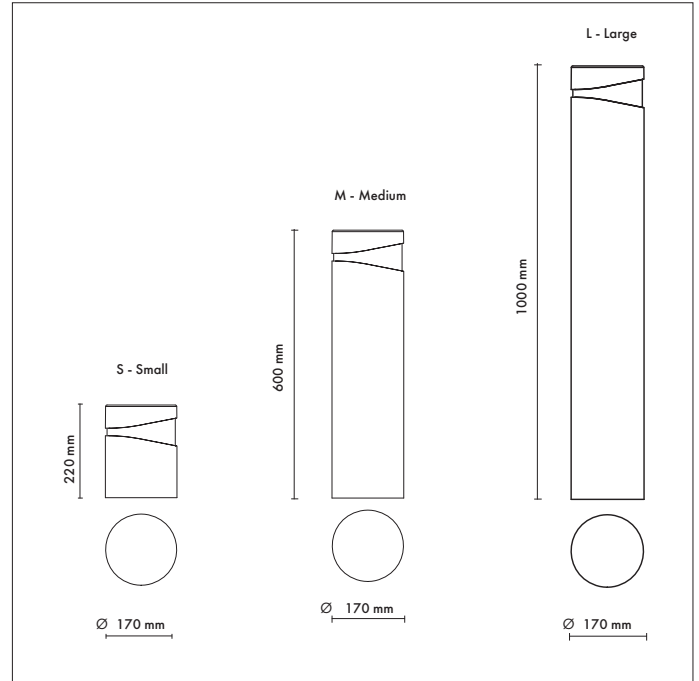

Key Features

- IP65 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **HOR/M/681/360/3/BLK** = Horus, Medium, 361lm, 360°, 3000k, Black.


Accessories

- Root Attachment **BOU/ROOT**

Part No.	W	Lm	CCT	Height	Weight
HOR/S/340/180/3	9	340	3000K	220mm	4.0kg
HOR/S/681/360/3	18	681	3000K	220mm	4.2kg
HOR/M/340/180/3	9	340	3000K	600mm	5.5kg
HOR/M/681/360/3	18	681	3000K	600mm	5.7kg
HOR/L/340/180/3	9	340	3000K	1000mm	7.0kg
HOR/L/681/360/3	18	681	3000K	1000mm	7.2kg

For more information, please contact Sales@ldl.lighting

180°

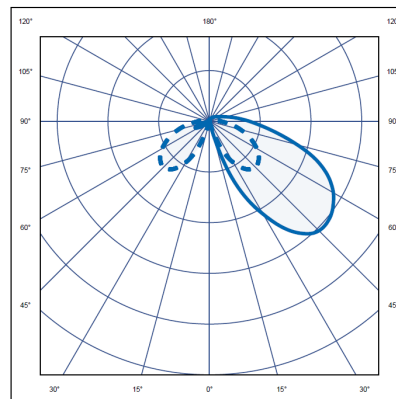

360°

