


# Ravello

## Downlighter

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

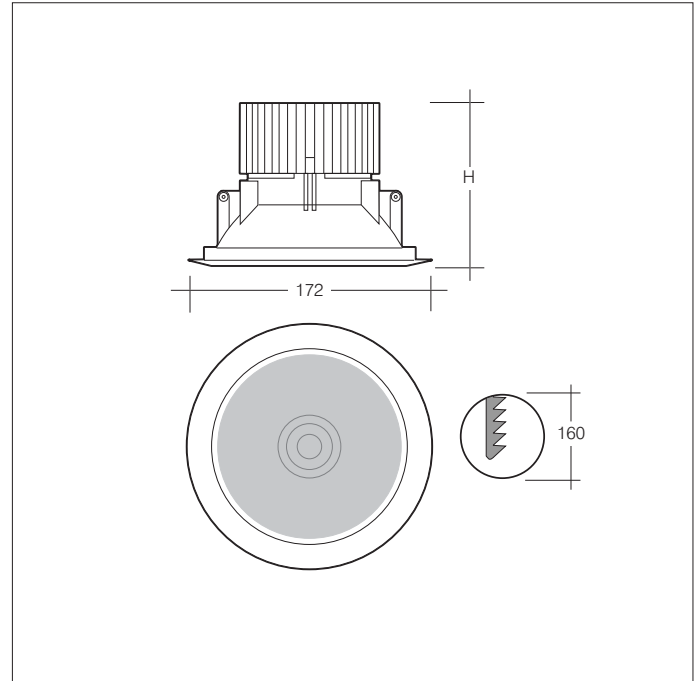

### Key features

- IP44 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 121lm/W
- Nominal life-time of > 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 313 lm

### Options

- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For leading/trailing edge dimmable suffix: **/MDIM**
- For 3hr emergency suffix: **/EMR**
- For self-test emergency suffix: **/ST**
- For DALI addressable emergency suffix: **/EMP**

i.e. **RAV/1700/4/OP/DIM/EMP =**

Ravello, 1700 lumens, 15W, 4000K, IP44 opal diffuser, DALI dimmable c/w DALI emergency.

CRI > 80 supplied as standard, CRI > 90 available on request.

Part No.	Lm	W	Lm/W	CCT	H(mm)
RAV/1070/3	1070	9	119	3000K	80
RAV/1090/4	1090	9	121	4000K	80
RAV/1660/3	1660	15	111	3000K	80
RAV/1700/4	1700	15	113	4000K	80
RAV/2000/4	2000	17	118	4000K	80
RAV/2400/3	2400	23	104	3000K	80
RAV/2460/4	2460	23	107	4000K	115
RAV/3410/3	3410	37	92	3000K	115
RAV/3500/4	3500	37	95	4000K	115
RAV/4020/3	4020	41	98	3000K	145
RAV/4130/4	4130	41	101	4000K	115

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)