


# Henry Halo

## Downlighter

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

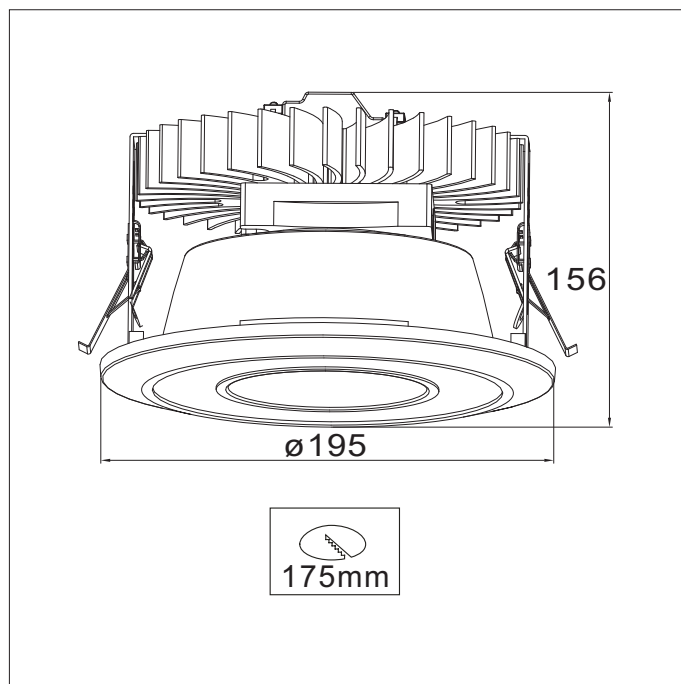

### Overview

The Henry downlighter is a high quality downlighter ideal for corridors and general purpose areas.

A sand blasted aluminium reflector is fitted which produces a very wide optical performance making the range suitable for various applications.

The range incorporates both a 4000K and a 3000K colour temperature and the various configurations including DALI dimmable and integral emergency.

### Options

- For DALI dimmable suffix: /DIM
- For leading/trailing edge dimmable suffix: /MDIM
- For switch-dim suffix: /SDIM
- For wireless DALI dimmable suffix: /WD
- For 3hr emergency suffix: /EMR
- For Monitor 3hr self-test emergency suffix: /MON
- For DALI addressable emergency suffix: /EMP
- For Casambi wireless dimmable suffix: /CAS
- For wireless DALI addressable suffix: /WAE

- i.e.: Henry Halo downlighter, 19W, 1648lm, 4000K, DALI dimmable c/w 3hr emergency = HEN/H/1600/4/DIM/EMR

Part No.	Lm	W	Lm/W	Weight	CCT
HEN/H/900/3	851	10	88	1.1kg	3000K
HEN/H/900/4	881	10	90	1.1kg	4000K
HEN/H/1200/3	1178	13	89	1.1kg	3000K
HEN/H/1200/4	1218	13	90	1.1kg	4000K
HEN/H/1600/3	1594	19	86	1.1kg	3000K
HEN/H/1600/4	1648	19	87	1.1kg	4000K
HEN/H/1800/3	1791	18	99	1.2kg	3000K
HEN/H/1800/4	1895	18	103	1.2kg	4000K
HEN/H/2200/3	2109	22	96	1.2kg	3000K
HEN/H/2200/4	2230	22	100	1.2kg	4000K
HEN/H/2500/3	2439	26	93	1.2kg	3000K
HEN/H/2500/4	2581	27	97	1.2kg	4000K

### Key features

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of upto 103lm/W
- Nominal life-time of 50,000 h (L80/B10)
- Small colour tolerance - MacAdam 3
- UGR < 19 up to 1600 lumens

