
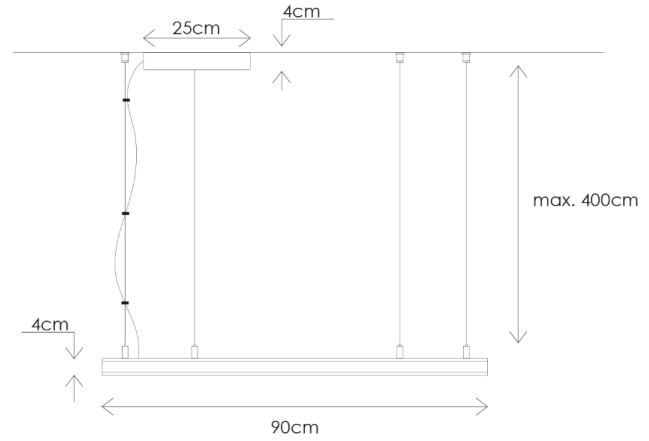


Indoor Lighting

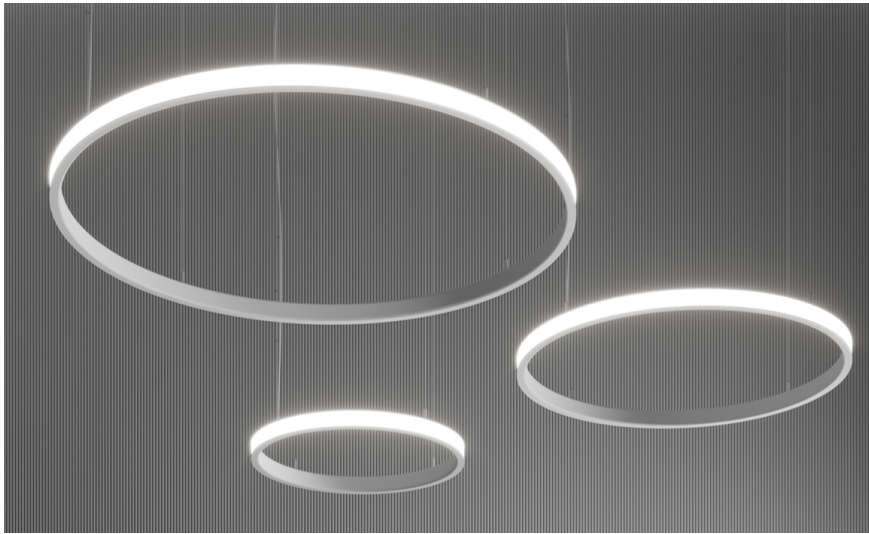

Key Features


- IP20 suitable for internal environments
- Efficacy of up to 145lm/W
- Nominal life-time of 60,000 h (L80/B10)
- High colour rendering index CRI > 80

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For DALI dimmable system suffix /DIM

e.g.: LIZ/9/8349/4/BLK

Lizzy, 900mm, 8349lm, 58W, 4000K, Black

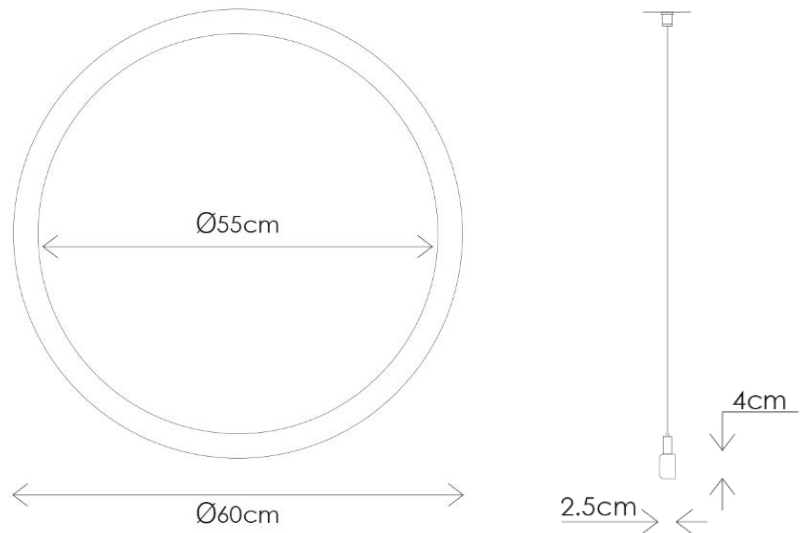

Part No.	Lm	W	Lm/W	D(mm)
LIZ/6/5509/4	5509	38	145	ø550
LIZ/9/8349/4	8349	58	144	ø850
LIZ/12/11189/4	11189	78	143	ø1150

For more information, please contact Sales@ldl.lighting