


Leila M

Spotlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

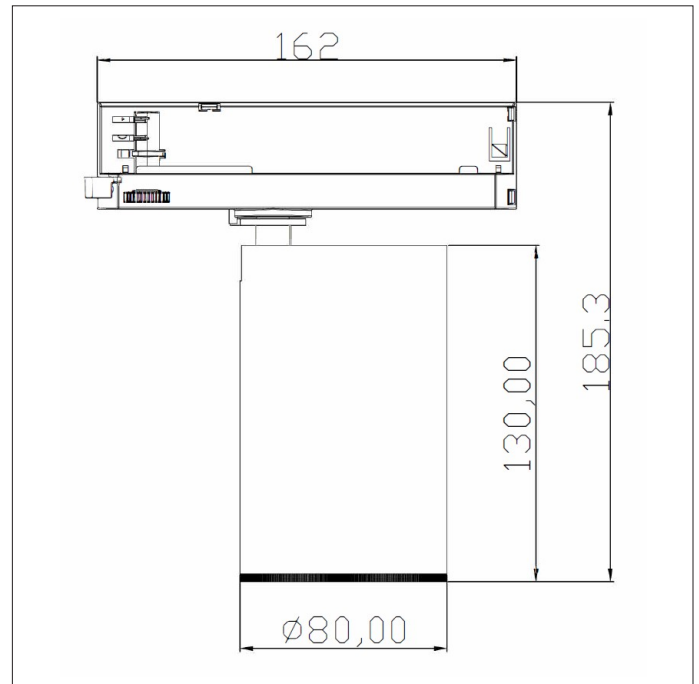

Key features

- Track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 133lm/W
- Nominal life-time of 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose

Options

- For 15° reflector suffix: /15D
- For 24° reflector suffix: /24D
- For 36° reflector suffix: /36D
- For 45° reflector suffix: /45D
- For 60° reflector suffix: /60D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF

i.e.: Leila Medium Trackspot, 10W, 1401lm, 4000K, 60° reflector, black finish, Casambi enabled =
LEI/M/1401/4/60D/BLK/CAS

CRI 80 as standard, CRI 90 available on request.

Part No. (3000K)	Lm	W	Lm/W
LEI/M/1273/15D/3	1273	10	120
LEI/M/2060/15D/3	2060	18	112
LEI/M/2698/15D/3	2698	26	103
LEI/M/1330/60D/3	1330	10	125
LEI/M/2149/60D/3	2149	18	117
LEI/M/2802/60D/3	2802	26	107
Part No. (4000K)	Lm	W	Lm/W
LEI/M/1340/15D/4	1340	10	127
LEI/M/2169/15D/4	2169	18	119
LEI/M/2840/15D/4	2840	26	109
LEI/M/1401/60D/4	1401	10	133
LEI/M/2263/60D/4	2263	18	124
LEI/M/2950/60D/4	2950	26	113

For more information, please contact Sales@ldl.lighting

Leila M


Spotlight

Innovation.
Collaboration.
Illumination.




Indoor Lighting


15° Optic:

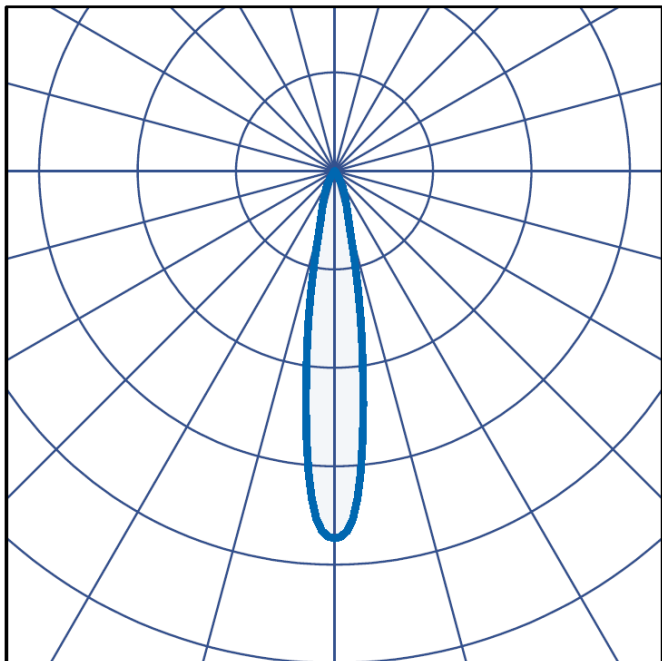

24° Optic:

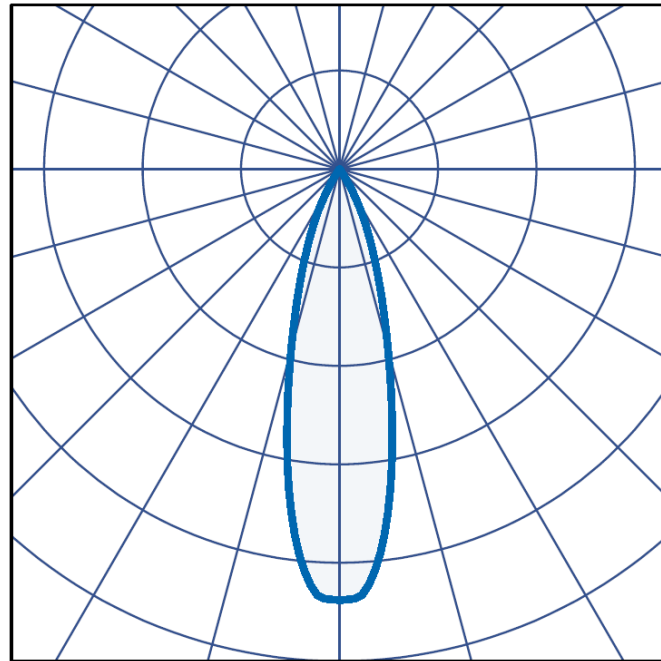

36° Optic:

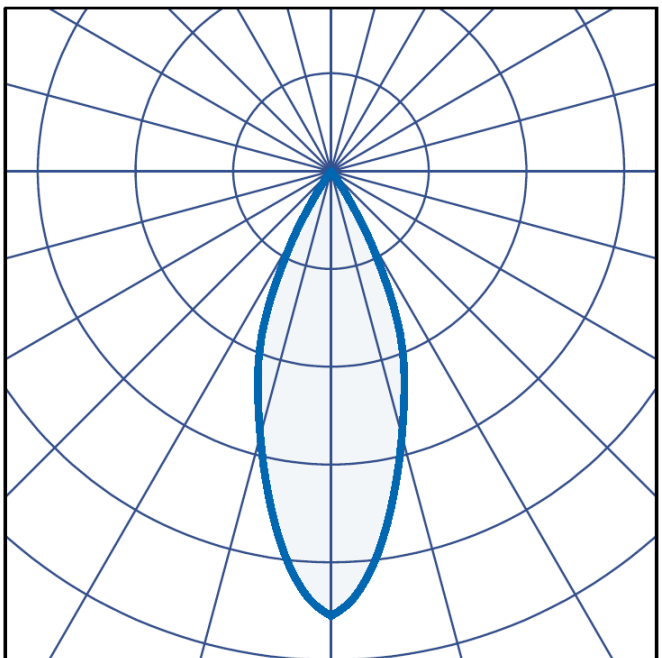

45° Optic:

