



# LED 3 Surface

## Square Emergency Downlight




- Suitable for ceiling recess applications
- Plugs and Leads for simple installation
- Strain Relief Module
- Suitable for 40mm or greater aperture
- Features extra long life PO4 batteries
- IP20 rating
- CCT 4000K
- Weight = 0.42kg / DALI = 0.44kg

### To Specify:

Select Part Number with additional options if required

#### Options

- For white finish suffix: /WHI
- For black finish suffix: /BLK
- For open Area optic suffix: /OA
- For open Area optic suffix: /CO
- For 3hr self-test emergency suffix: /ST
- For 3hr Self-contained DALI emergency suffix: /EMP
- For remote battery suffix: /REM

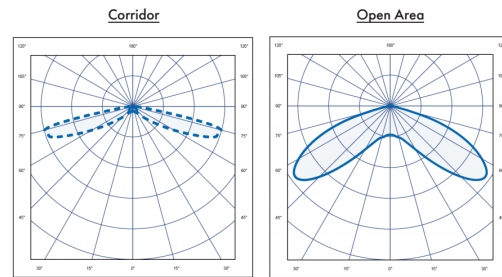

### Corridor Spacing Table

Mounting Height	Along Corridor (length)				Along Corridor (width)			
	To Wall		Between Fittings		Between Fittings		To Wall	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	9.9m	8.1m	22.3m	19.7m	7.9m	6.3m	3.1m	2.4m
3.0m	10.7m	8.4m	25.4m	21.5m	8.4m	6.6m	3.3m	2.4m
4.0m	11.8m	0.4m	29.5m	23.5m	9.2m	6.8m	3.4m	0.2m
5.0m	11.5m	-	32.2m	22.9m	9.6m	6.2m	3.1m	-
6.0m	-	-	33.5m	-	9.6m	-	-	-

### Open Area Spacing Table

Mounting Height	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	5.2m	4.2m	12.1m	10.3m
3.0m	5.6m	4.4m	13.5m	11.2m
4.0m	6.2m	-	15.4m	12.4m
5.0m	-	-	16.9m	-
6.0m	-	-	17.7m	-

