


Brooklyn

Premium Back-lit Panel

Innovation.
Collaboration.
Illumination.



Indoor Lighting

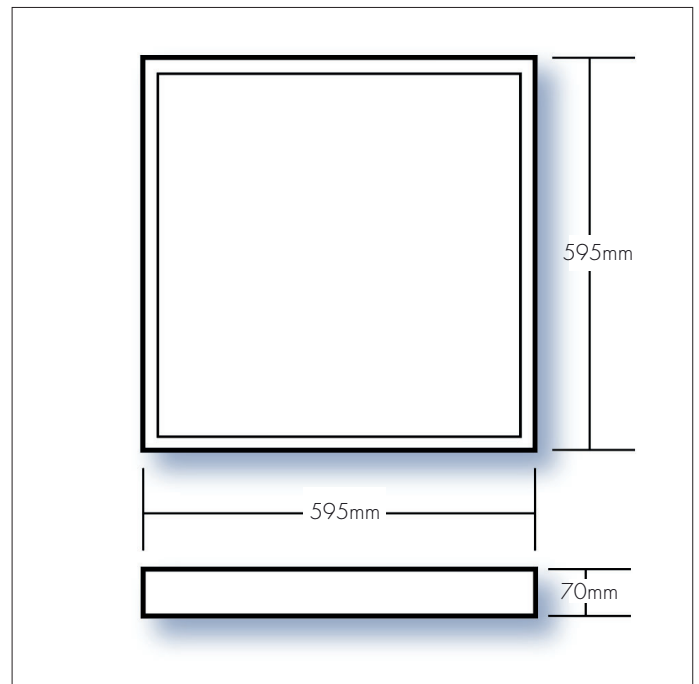

Key features

- IP20 suitable for internal environments
- Impact rating of IK08
- Efficacy of up to 126m/W
- Nominal life-time of 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser, 3mm polycarbonate TP(a)
- Microprism diffuser, 2mm PET TP(a)


Brooklyn

Premium Back-lit Panel


Innovation.
Collaboration.
Illumination.



Indoor Lighting

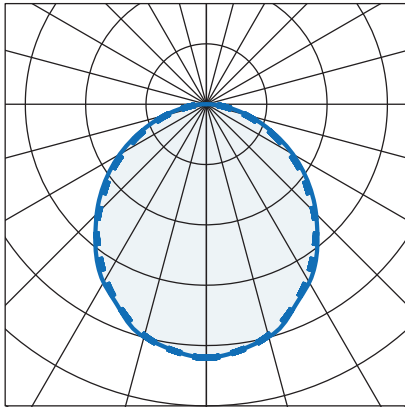

Frosted Opal					
Part No.	Lm	W	Lm/W	Weight	CCT
BRO/66/OP/1840/4	1840	15	123	6.1kg	4000K
BRO/66/OP/3140/4	3144	25	124	6.1kg	4000K
BRO/66/OP/4340/4	4335	35	126	6.1kg	4000K
BRO/66/OP/6040/4	6039	49	123	6.1kg	4000K
BRO/66/OP/7180/4	7179	59	121	6.1kg	4000K
BRO/66/OP/8110/4	8108	68	119	6.1kg	4000K

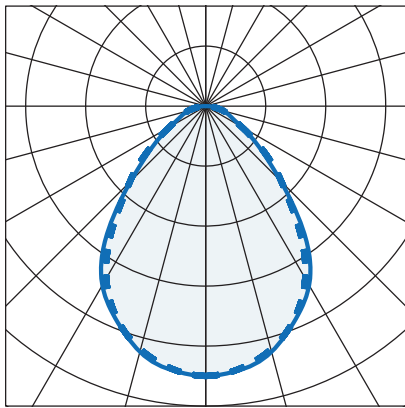

Microprism					
Part No.	Lm	W	Lm/W	Weight	CCT
BRO/66/MP/1710/4	1710	15	114	5.8kg	4000K
BRO/66/MP/2940/4	2938	25	116	5.8kg	4000K
BRO/66/MP/4040/4	4039	35	117	5.8kg	4000K
BRO/66/MP/5620/4	5621	49	115	5.8kg	4000K
BRO/66/MP/6700/4	6700	59	113	5.8kg	4000K
BRO/66/MP/7550/4	7553	68	111	5.8kg	4000K

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For DALI dimmable system suffix /DIM
- For Casambi enabled suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE

Accessories

- Wire suspension kit

BRO/WIRE

i.e.: Brooklyn, opal diffuser, 4335 lumens, 35W, 4000K, c/w 3 hr emergency
= **BRO/66/OP/4340/4/EMR**

CRI >80 supplied as standard, CRI >90 available upon request