
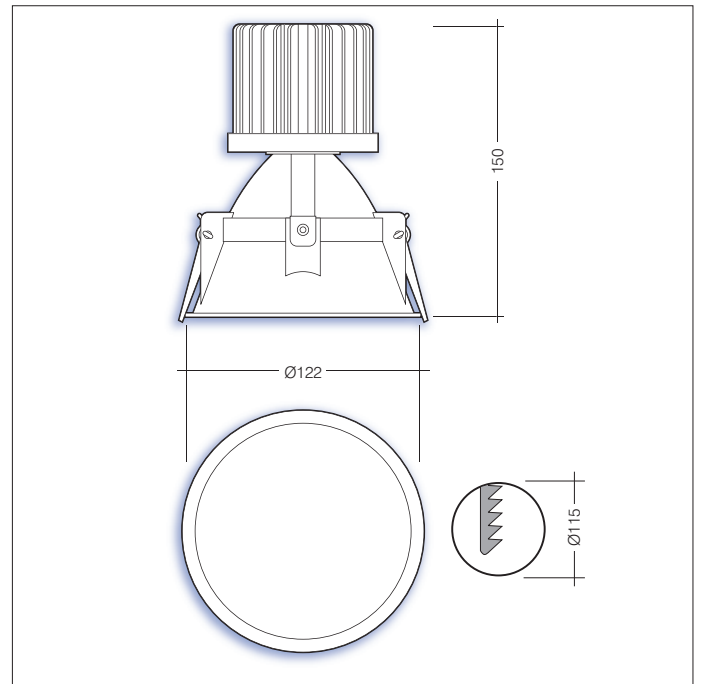


Indoor Lighting



Overview

The OSCAR downlight is designed with a slim bezel, available in black or white to give an aesthetically pleasing finish along with a deep baffle which produces low glare (UGR) when fitted with a 25° reflector.

Two beam angles are available and three colour temperatures making the fixtures suitable for most commercial and residential applications.

The range is enhanced with various options including dimmable drivers, remote emergency, monitor self-test emergency and D- E-1ro emergency.

Casambi enabled drivers can be fitted to create wireless mesh systems.

Part No.	Lm	W	Lm/W	Beam	CCT
OSC/1140/25/2	1136	14	80	25	2700,
04				25	00,
04		14		25	00,
OSC/110//					,
OSC/120/ /		14			00,
OSC/10//4					,

More outputs available, see www.LDL.lighting

OUTPUT

PS%NNBCMEGY /%
 PSBBNCDBCMEGY /\$
 PSMBECHSBMDEENNBCMEGY /.%
 PSISNSDDGY /&
 PS.POWPSMGUENSDGY /.0/
 PS% BEESBCMRNSDDGY /&

1
 NDU\$BUOPG*
 GDBDZGP MN8
 /PNDBMMGONPG I-#
 BMP\$UBCMWNI UDEBN
)HPMP\$SE\$DEE\$*
 NSDZMN

i.e. OSC/1690/50/3/BLK/CAS =
 Oscar Downlight, 1691 Lumens, 21w, 50°, 3000K, Black Bezel &
 Casambi Enabled