


Rita Small

Spotlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

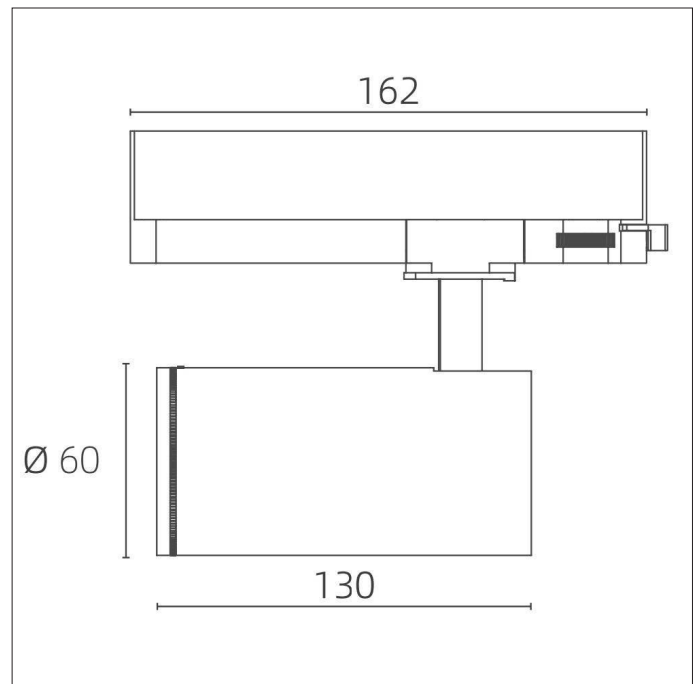

Key features

- Adjustable track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 113lm/W
- Nominal life-time of 40,000 h (L90/B10), 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam

Options

- For 20° reflector suffix: /20D
- For 35° reflector suffix: /35D
- For 50° reflector suffix: /50D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF

i.e.: RITA/S/1296/4/50D/BLK/CAS = Rita Small, 11W, 1296lm, 4000K, 50D reflector, black finish, Casambi enabled.

CRI 80 as standard, CRI 90 available on request.

Part No.

Lm


W

Lm/W


RIT/S/1260/20D/4	1260	11	110
RIT/S/1590/20D/4	1590	15	101
RIT/S/1882/20D/4	1882	20	94
RIT/S/1278/35D/4	1278	11	111
RIT/S/1613/35D/4	1613	15	102
RIT/S/1908/35D/4	1908	20	95
RIT/S/1296/50D/4	1296	11	113
RIT/S/1635/50D/4	1635	15	104
RIT/S/1935/50D/4	1935	20	97

For more information, please contact Sales@ldl.lighting


20° Optic:

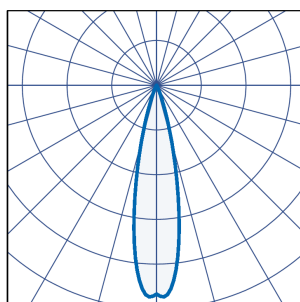

35° Optic:

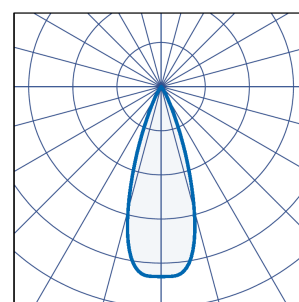

50° Optic:




Rita Medium

Spotlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

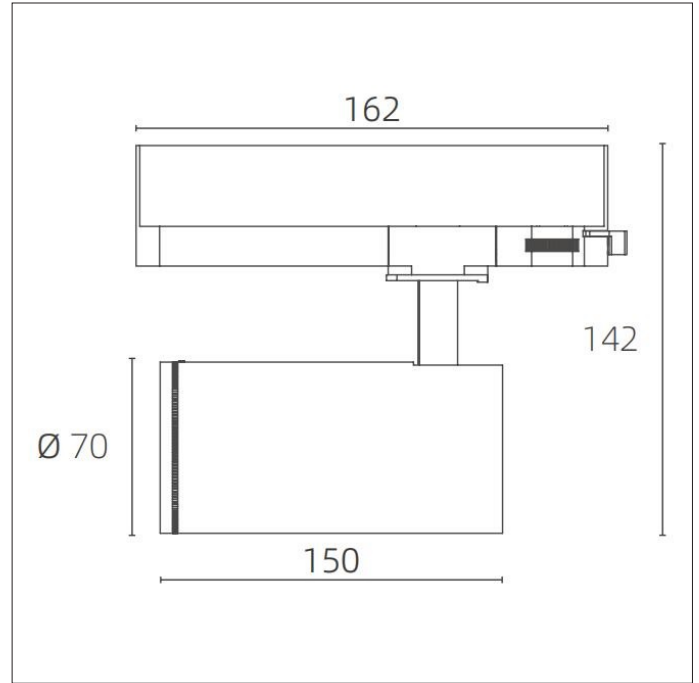

Key features

- Adjustable track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 114lm/W
- Nominal life-time of 40,000 h (L90/B10), 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam

Options

- For 20° reflector suffix: /20D
- For 35° reflector suffix: /35D
- For 50° reflector suffix: /50D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF


i.e.: RITA/M/1285/4/50D/BLK/CAS = Rita Medium, 11W, 1285lm, 4000K, 50D reflector, black finish, Casambi enabled.

CRI 80 as standard, CRI 90 available on request.


Part No.	Lm	W	Lm/W
RIT/M/1247/20D/4	1247	11	111
RIT/M/1970/20D/4	1970	19	101
RIT/M/2607/20D/4	2607	27	94
RIT/M/1266/35D/4	1266	11	112
RIT/M/2000/35D/4	2000	19	103
RIT/M/2647/35D/4	2647	27	95
RIT/M/1285/50D/4	1285	11	114
RIT/M/2030/50D/4	2030	19	104
RIT/M/2686/50D/4	2686	27	97

For more information, please contact Sales@ldl.lighting


20° Optic:

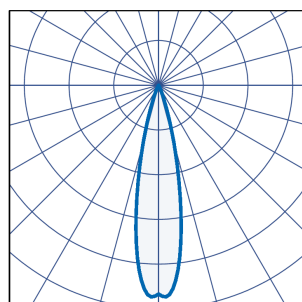

35° Optic:

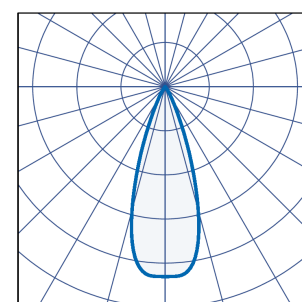

50° Optic:

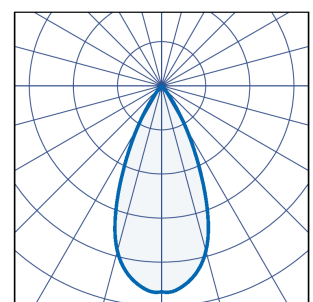


Rita Large

Spotlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

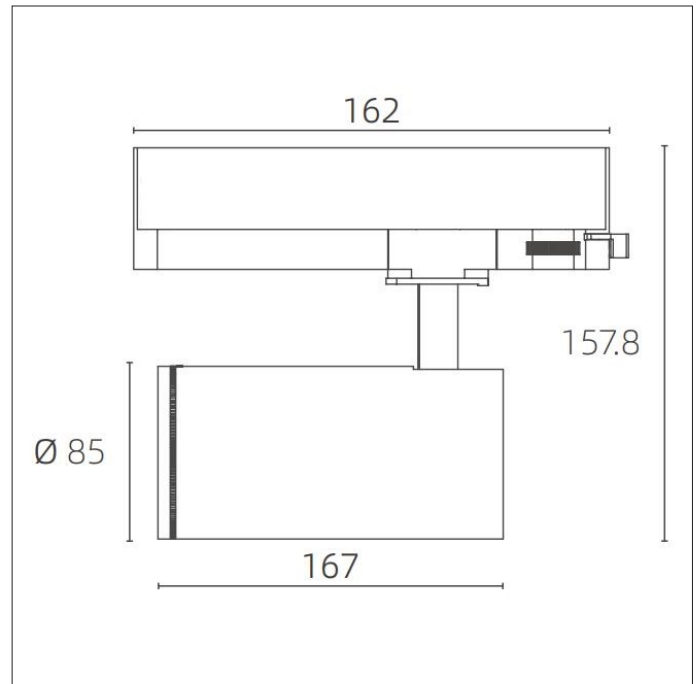

Key features

- Adjustable track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 115lm/W
- Nominal life-time of 40,000 h (L90/B10), 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam

Options

- For 20° reflector suffix: /20D
- For 35° reflector suffix: /35D
- For 50° reflector suffix: /50D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF


i.e.: RITA/L/1295/4/50D/BLK/CAS = Rita Large, 11W, 1295lm, 4000K, 50D reflector, black finish, Casambi enabled.

CRI 80 as standard, CRI 90 available on request.


Part No.	Lm	W	Lm/W
RIT/L/1257/20D/4	1257	11	112
RIT/L/1985/20D/4	1985	15	102
RIT/L/2627/20D/4	2627	20	94
RIT/L/1276/35D/4	1276	11	113
RIT/L/2015/35D/4	2015	15	104
RIT/L/2666/35D/4	2666	20	96
RIT/L/1295/50D/4	1295	11	115
RIT/L/2045/50D/4	2045	15	105
RIT/L/2706/50D/4	2706	20	97

For more information, please contact Sales@ldl.lighting

20° Optic:

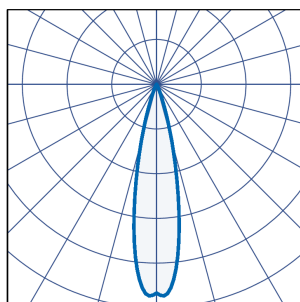

35° Optic:

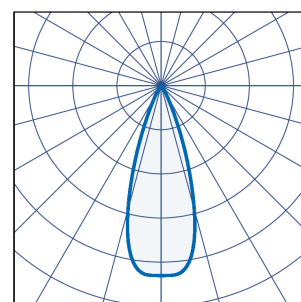

50° Optic:

