




Street Small

Post Top

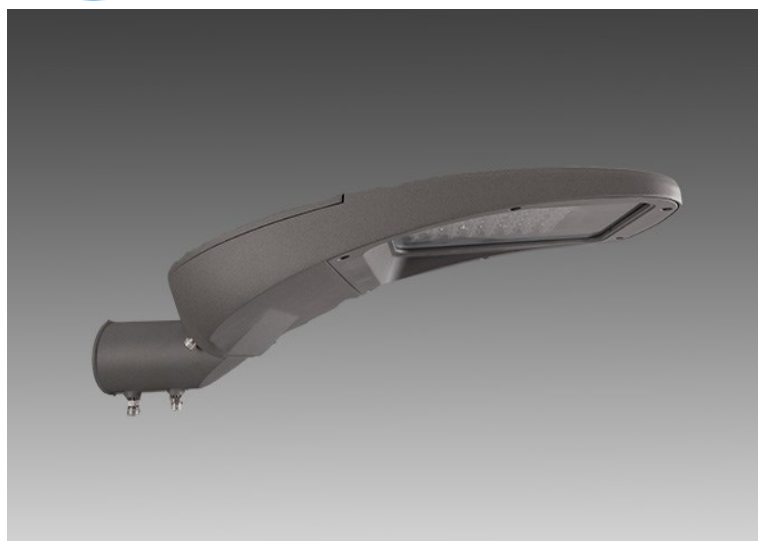

- Efficacies up to 158 lm/W
- Impact rating of IK08
- Nominal life of 102,000 hours (L90, B10)
- IP66 Suitable for external environments
- Operating Temperature from -40 to +50°
- Installation Height 3-6m
- Net Weight 3kg
- 4000K as standard
- Spigot size—Ø 50mm

To Specify:

Select Part Number with additional options if required

AS1 Lens	Lm	W	Lm/W	CCT
ST/S/AS1/2645/4	2645	20	132	4000K

ST/S/AS1/3768/4	3768	27	136	4000K
-----------------	------	----	-----	-------

ST/S/AS1/5283/4	5283	41	127	4000K
-----------------	------	----	-----	-------

AS2 Lens	Lm	W	Lm/W	CCT
ST/S/AS2/2629/4	2629	20	132	4000K

ST/S/AS2/3620/4	3620	27	131	4000K
-----------------	------	----	-----	-------

ST/S/AS2/5068/4	5068	41	122	4000K
-----------------	------	----	-----	-------

AREA Lens	Lm	W	Lm/W	CCT
ST/S/AREA/3106/4	3106	20	155	4000K

ST/S/AREA/4376/4	4376	27	158	4000K
------------------	------	----	-----	-------

ST/S/AREA/6077/4	6077	41	146	4000K
------------------	------	----	-----	-------

For more information, please contact Sales@ldl.lighting

