


# Dominique M

## Surface Mounted

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

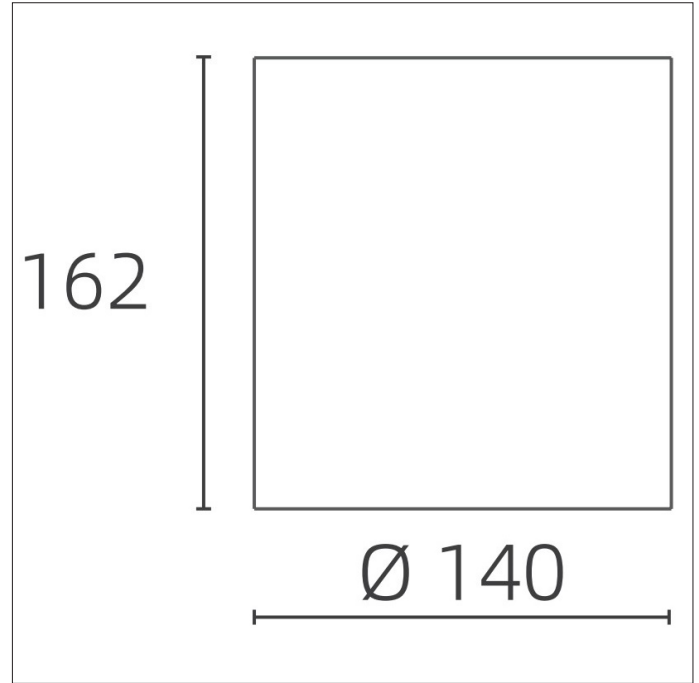

### Key Features

- IP20 suitable for internal environments
- Nominal life-time of 100,000 h (L80/B10)
- Impact rating of IK05
- Efficacy of up to 127lm/W
- Various colour temperatures are available
- Colour stability with 3 step MacAdam

### Options

- For Black finish suffix: /BLK
- For White finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For 3hr self-contained emergency suffix: /EMR
- For 3hr self-contained DALI emergency suffix: /EMP
- For 3hr self-contained monitor self-test emergency suffix: /MON

i.e. **DOM/M/1357/4/60D/DIM/EMR** = Dominique Medium, 11W, 1361 lumens, 4000K, 60D, DALI dimmable c/w 3hr self-contained emergency

CRI 80 as standard, CRI 90 available on request.

Part No. (3000K)	Lm	W	lm/W
DOM/M/1281/20D/3	1281	11	120
DOM/M/2775/20D/3	2775	26	105
DOM/M/1271/40D/3	1271	11	119
DOM/M/2754/40D/3	2754	26	105
DOM/M/1289/60D/3	1289	11	121
DOM/M/2792/60D/3	2792	26	106

Part No. (4000K)	Lm	W	lm/W
DOM/M/1349/20D/4	1349	11	127
DOM/M/2921/20D/4	2921	26	111
DOM/M/1338/40D/4	1338	11	126
DOM/M/2899/40D/4	2899	26	110
DOM/M/1357/60D/4	1357	11	127
DOM/M/2939/60D/4	2939	26	112

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

# Dominique M


Surface Mounted

Innovation.  
Collaboration.  
Illumination.




Indoor Lighting

20° Optic:

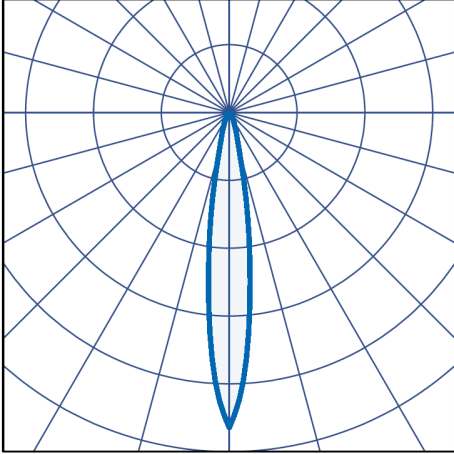

40° Optic:

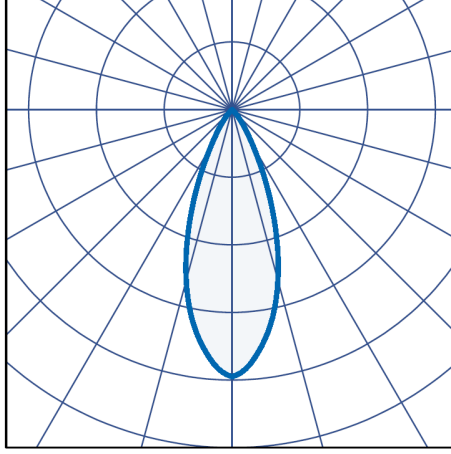

60° Optic:

