


# LED2000

## Downlighter

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

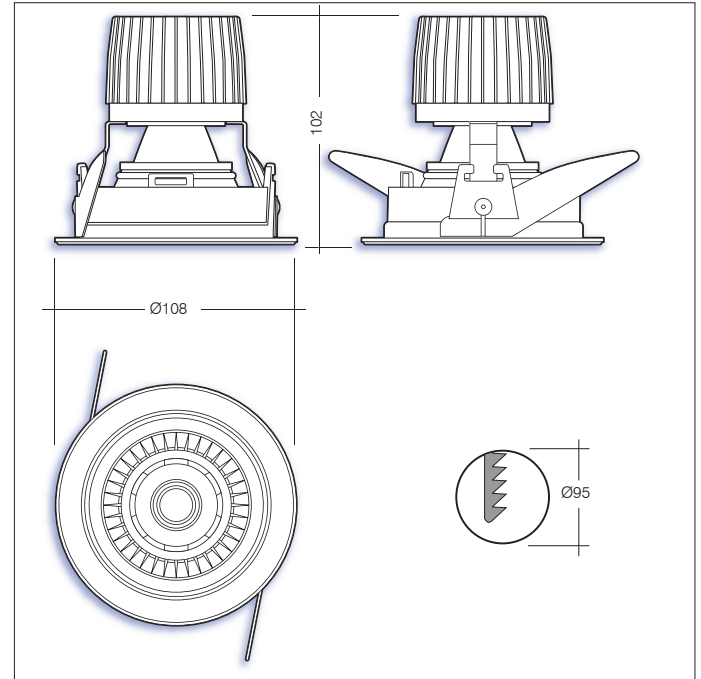

### Key features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 100lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 325 lm

### Options

- For corridor function suffix **/COR**
- For DALI dimmable suffix **/DIM**
- For 3hr self-contained emergency suffix **/EMR**
- For 3hr self-contained self-test emergency suffix **/ST**
- For 3hr self-contained DALI emergency suffix **/EMP**

i.e. **LED2000/1000/4/COR** =  
LED2000 Downlight, 995 lumens, 4000K, CRI > 80 c/w corridor function

CRI > 80 as standard, CRI > 90 available on request.  
White finish as standard, other finishes available on request

Part No.	W	L	Lm/W	CCT	CRI
LED2000/570/3	7	571	86	3000K	80+
LED2000/610/4	7	612	92	4000K	80+
LED2000/920/3	10	919	92	3000K	80+
LED2000/1000/4	10	995	100	4000K	80+
LED2000/1250/3	13	1248	94	3000K	80+
LED2000/1340/4	13	1340	100	4000K	80+

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

