


Indoor Lighting

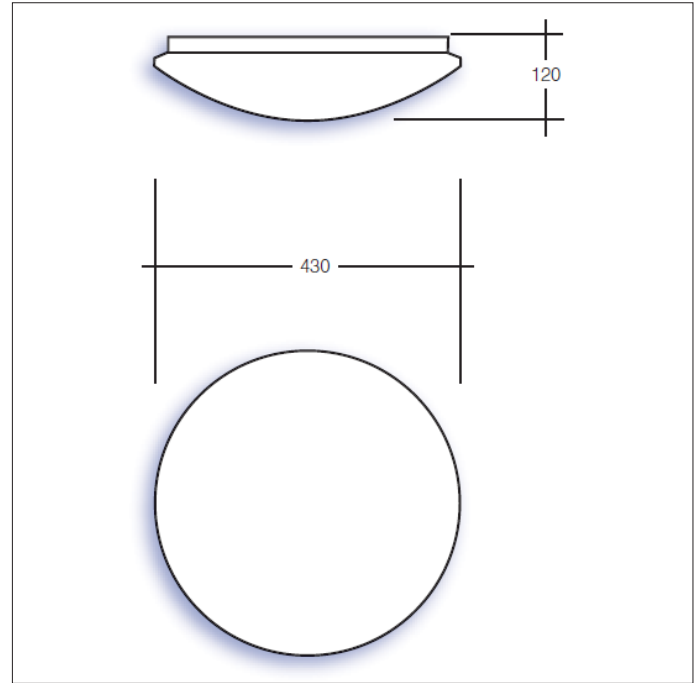

Key features

- IP20 suitable for internal environments
- Impact rating of IK06
- TP(a) fire rated
- CRI >80
- Efficacy of up to 142lm/W
- Nominal life-time of >72,000 hr (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 420 lm

Options

- For DALI dimmable suffix /DIM
- For Casambi enabled suffix /CAS
- For wireless dimmable system suffix /WD
- For 3 hr self-contained emergency suffix /EMR
- For self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e.: **ZMP/3092/4/CAS/ST** =
ZMP, 3092 lumens, 22W, 4000K, Casambi enabled,
c/w self-test emergency

Part No.	Lm	W	lm/W	CCT
ZMP/2157/3	2157	16	135	3000K
ZMP/2271/4	2271	16	142	4000K
ZMP/2993/3	2993	22	133	3000K
ZMP/3092/4	3092	22	141	4000K
ZMP/3557/3	3557	28	127	3000K
ZMP/3759/4	3759	28	134	4000K

For more information, please contact Sales@ldl.lighting

Sensor Options

- On-off, no daylight control suffix /F1
- On-off, with daylight control suffix /F2
- Corridor function, no daylight control suffix /F3
- Corridor function, with daylight control suffix /F4
- Dimm to off, no daylight control suffix /F5
- Dimm to off, with daylight control suffix /F6

