


### Indoor Lighting

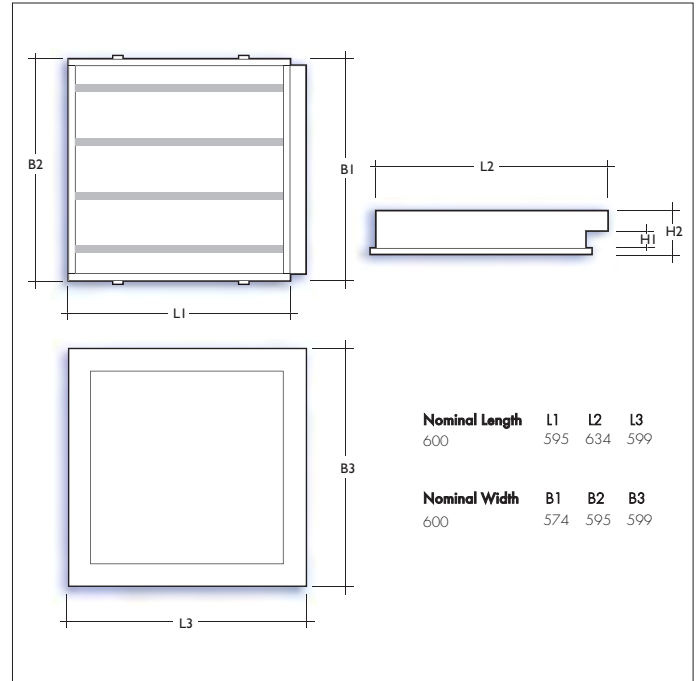

### Key Features

- IP65 suitable for indoor environments
- Efficacy of up to 139lm/W
- Nominal life-time of 60,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80

### Options

- For 3000K suffix: /3
- For 4000K suffix: /4
- For TP(a) prismatic suffix: /MP
- For TP(a) opal suffix: /OP
- For rapid fix frame suffix: /RF
- For DALI dimmable suffix: /DIM
- For 3hr emergency suffix: /EMR
- For self-test suffix: /ST
- For addressable emergency suffix: /EMP

Concealed fix options are also available for various ceiling types on request

i.e. **ISA/OP/4828/4/ST=**  
Isaac 600x600, 4828 Lumens, 36W, Opal Diffuser c/w Self-test Emergency.

| Part No.    | Lm   | W  | Lm/W |
|-------------|------|----|------|
| ISA/OP/2952 | 2952 | 21 | 139  |
| ISA/OP/3924 | 3924 | 28 | 137  |
| ISA/OP/4828 | 4828 | 36 | 134  |
| ISA/OP/5753 | 5753 | 43 | 132  |
| ISA/MP/2792 | 2792 | 21 | 131  |
| ISA/MP/3712 | 3712 | 28 | 130  |
| ISA/MP/4567 | 4567 | 36 | 127  |
| ISA/MP/5442 | 5442 | 43 | 125  |

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

