


Outdoor Lighting

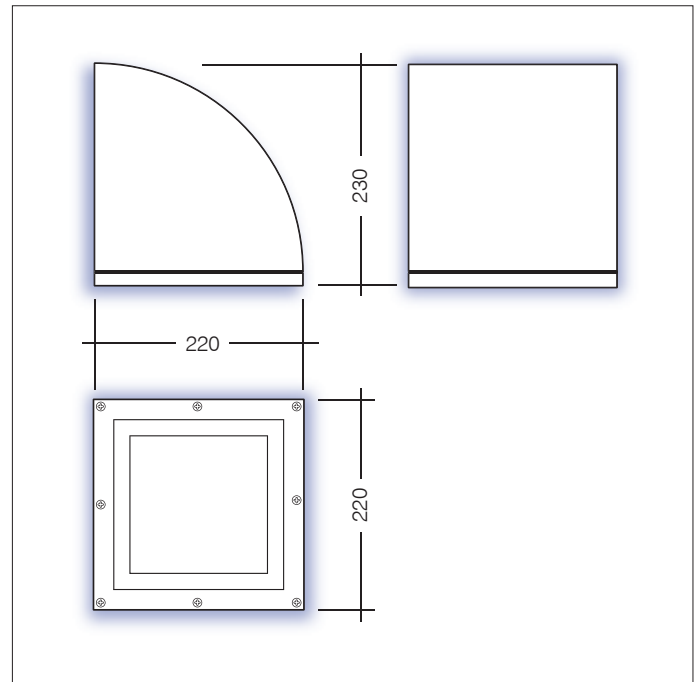

Key features

- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 124lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Emergency BLF = 276lm

Options

For Emergency suffix /EMR

For DALI dimmable suffix /DIM

For Self-test Emergency suffix /ST


For Dali Em-pro Emergency suffix /EMP

For a Graphite finish suffix /GRA

For a Silver finish suffix /SLV


L4 Flood Lens

Part No.	Lm	W	Lm/W
LUN/L4/1300/74	1307	13	94
LUN/L4/2000/74	2199	18	122
LUN/L4/3000/74	3120	26	120
LUN/L4/4000/74	4101	36	114

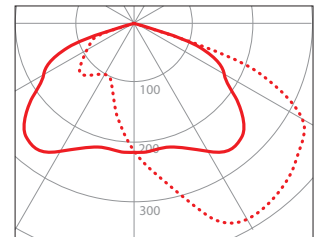

L6 Wide Pathway

Part No.	Lm	W	Lm/W
LUN/L6/1200/74	1205	13	87
LUN/L6/2000/74	2199	18	122
LUN/L6/3000/74	3120	26	120
LUN/L6/4000/74	4101	35	117

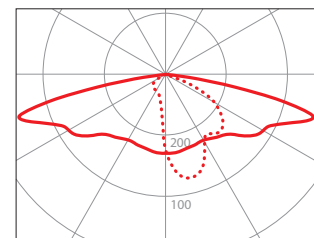

For more information, please contact Sales@ldl.lighting