


Indoor Lighting

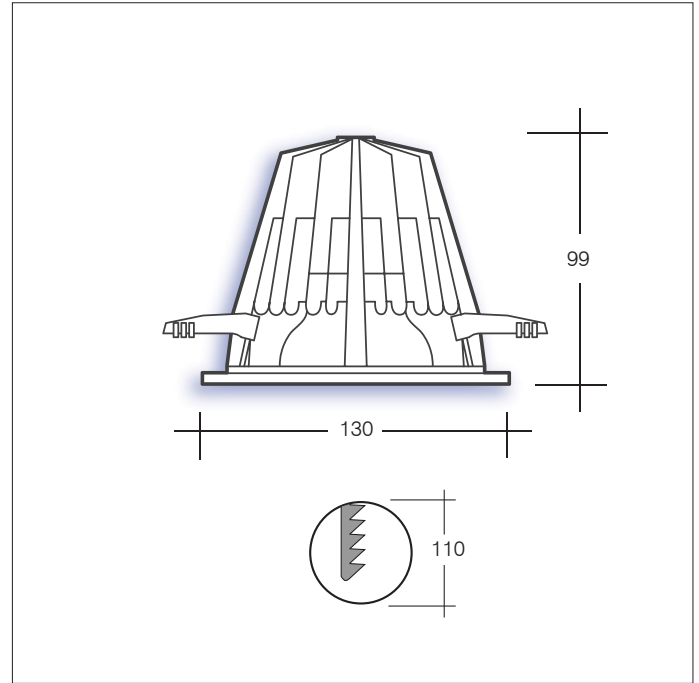

### Overview

The Juna range of downlighters incorporates the latest in LED technology, is fitted with a passive cast heatsink and has a range of accessories to accompany it.

A choice of four lumen outputs, 3000K or 4000K and with a ceiling cut out of just Ø110mm means the Juna downlighter is perfect for all applications.

### Key features

- IP20/IP54
- Impact rating of IK05
- Efficacy of up to 132lm/W
- Nominal life-time of >55,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 314 lm

### Options

- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For leading/trailing edge dimmable suffix: **/MDIM**
- For 3hr emergency suffix: **/EMR**
- For Monitor self-test emergency suffix: **/MON**
- For DALI addressable emergency suffix: **/EMP**
  
- i.e.: Juna 1725lm, 14W, 3000K, DALI dimmable, 3hr emergency, white bezel = **JUN/1720/3/DIM/EMR/WHI**
  
- CRI 80 as standard, CRI 90 available on request.
- White finish as standard, other finishes available on request.

| Part No.   | Lm   | W  | Lm/W | CCT   |
|------------|------|----|------|-------|
| JUN/1020/3 | 1020 | 8  | 128  | 3000K |
| JUN/1050/4 | 1055 | 8  | 132  | 4000K |
| JUN/1720/3 | 1725 | 14 | 125  | 3000K |
| JUN/1790/4 | 1787 | 14 | 129  | 4000K |
| JUN/2360/3 | 2363 | 19 | 123  | 3000K |
| JUN/2440/4 | 2442 | 19 | 127  | 4000K |
| JUN/3150/3 | 3146 | 28 | 113  | 3000K |
| JUN/3250/4 | 3252 | 28 | 117  | 4000K |

More outputs available, see [www.LDL.lighting](http://www.LDL.lighting)

### Accessories

