


Emergency

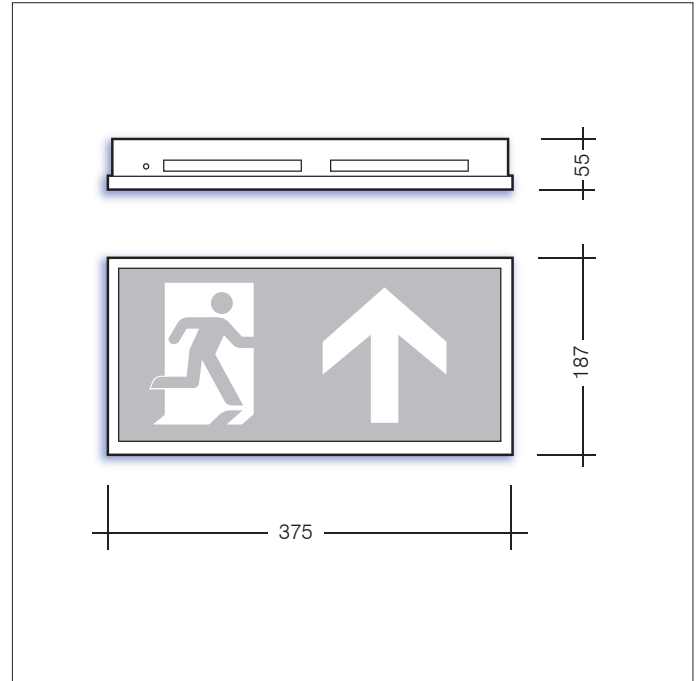

Key features

- IP20 suitable for internal environments
- Impact rating of IK06
- Efficacy of up to 100lm/W
- Nominal lifetime of 100,000 hours (L80,B10)
- Emergency BLF = 150 lm
- Battery: 1 x 3.6V 1.5Ah NiCd
- Light source: 16 x 4500K LEDs (CRI>80)
- Weight: 1.1 kg
- Viewing distance of 34m

Options

- For self test emergency suffix **/ST**
- For EM Pro option suffix **/EMP**

Part No.

Description

EX/LED/NM	Non-maintained Exit Sign supplied with a choice of Exit legends
EX/LED/M	Maintained Exit Sign supplied with a choice of Exit legends
EX/LED/240	240V Exit Sign supplied with a choice of Exit legends
EX/LGD	Exit legend with Arrow Down
EX/LGL	Exit legend with Arrow Left
EX/LGR	Exit legend with Arrow Right
EX/LGU	Exit legend with Arrow Up

For more information, please contact Sales@ldl.lighting