



Indoor Lighting

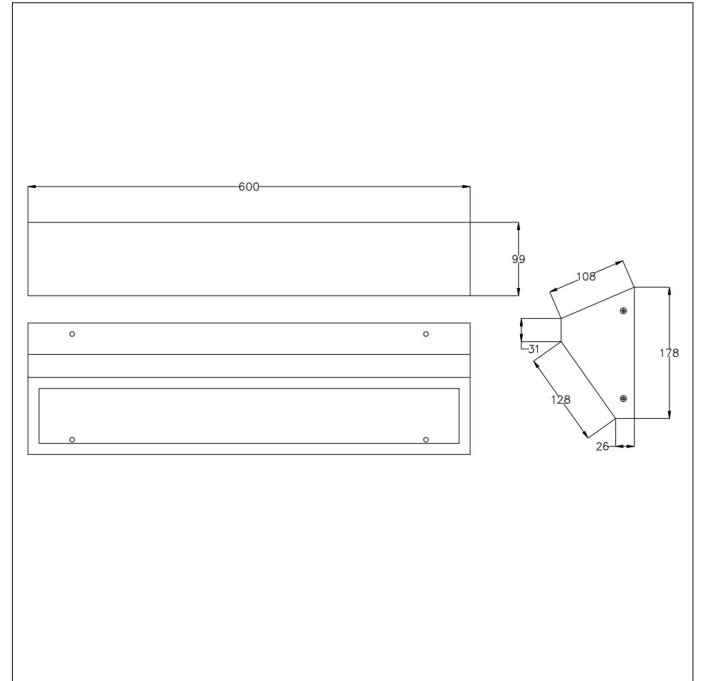

Options

- For 3 hour Maintained Emergency option suffix **/EMR**
- For DALI Dimmable suffix **/DIM**
- For 3hr Self-test emergency suffix **/ST**
- For DALI 3hr emergency suffix **/EMP**

i.e. Corey, 38W, 5498lm, 4000K, white, 3hr Self Test Emergency
= **CORE/5498/4/WHI/ST**

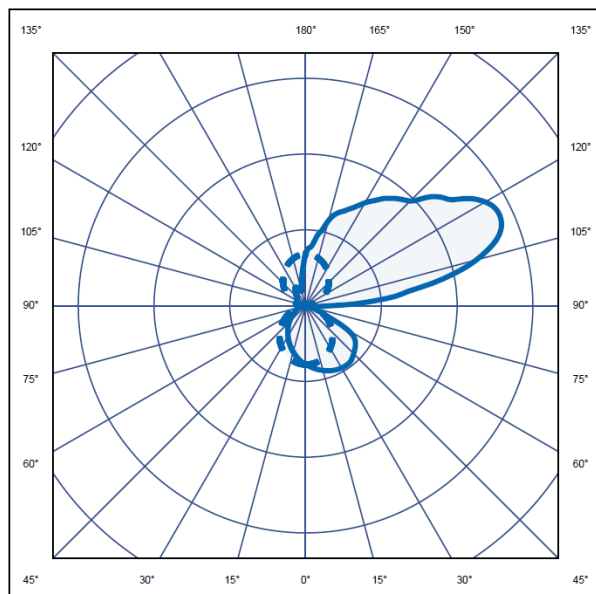

Part No.	W	Lm	Lm / W	L
CORE/4246/4	29	4246	146	600
CORE/4889/4	34	4889	143	600
CORE/5498/4	38	5498	141	600
CORE/6368/4	42	6368	149	900
CORE/7343/4	50	7343	147	900
CORE/8247/4	57	8247	144	900

For more information, please contact Sales@ldl.lighting

Key features

- IP54 suitable for internal environments
- Impact rating of IK10
- Efficacy of up to 164lm/W
- Nominal life-time of >50,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80