


Trent Sport

LED Hi Bay

Innovation.
Collaboration.
Illumination.



Indoor Lighting

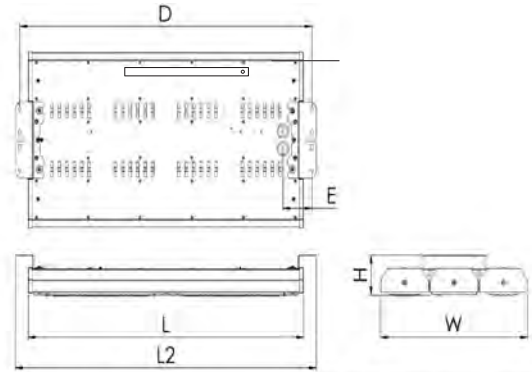

L, mm	W, mm	H, mm	L2, mm	D, mm	E, mm
435	345	78	495	475	62
645			705	685	68
945			1005	985	

Overview

An versatile industrial LED hi-bay luminaire with a modern construction and high impact resistance.

Impact rating of IK10

IP65 suitable for external environments

Optics: 40°, 60°, 75°, 120°, 30x70° light beam, silicone rubber sealing, impact resistance

Options

For 3000K optic suffix /3

For 4000K optic suffix /4

For 40deg optic suffix /40

For 60deg optic suffix /60

For 75deg optic suffix /75

For 120deg optic suffix /120

For High Rack 30x70deg optic suffix /HR

For DALI dimmable suffix /DIM

For casambi enabled suffix /CAS

For emergency suffix /EMR

For self-test suffix /ST

For addressable Emergency suffix /EMP

i.e. **TRE/2/25400/4/60 =**


Trent Sport Hi Bay 645mm Length, 25363lm, 149W,

4000K c/w 60deg Optics fitted


Part No.	W	Lm	Lm/W	Weight
TRE/SP/1/6450	41	6454	157	2.8kg
TRE/SP/1/7330	47	7326	156	2.8kg
TRE/SP/1/9040	59	9039	153	2.8kg
TRE/SP/1/10660	70	10659	152	2.8kg
TRE/SP/1/12290	83	12291	148	2.8kg
TRE/SP/2/14650	91	14652	161	4.3kg
TRE/SP/2/17990	115	17985	156	4.3kg
TRE/SP/2/21320	139	21317	153	4.3kg
TRE/SP/2/24460	163	24456	150	4.3kg
TRE/SP/3/26840	171	26839	157	6.5kg
TRE/SP/3/31810	207	31811	154	6.5kg
TRE/SP/3/36490	244	36493	150	6.5kg

For more information, please contact Sales@ldl.lighting


High Rack 30°x 70°

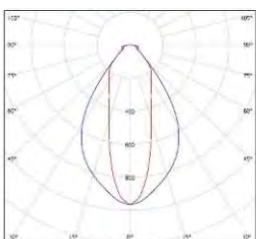


Narrow 40°

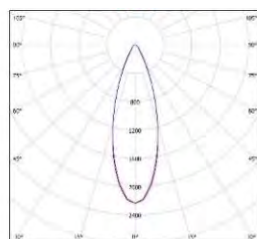

Medium 60°

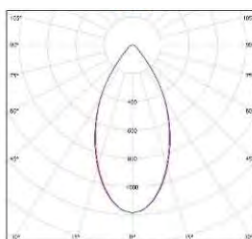

Wide 75°

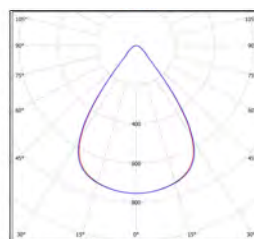

Extra-Wide 120°

