


# LED Tape

## Linear Surface

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

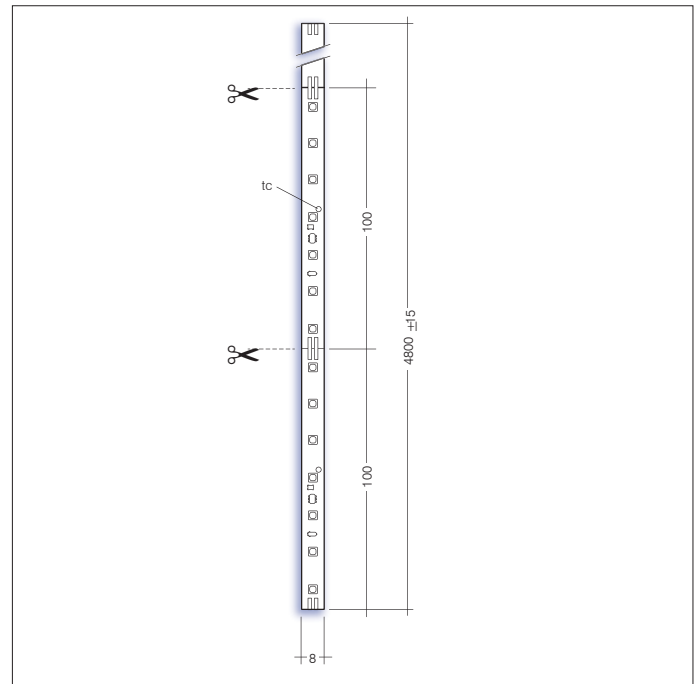

### Key Features

- IP00 suitable for indoor environments
- Dimmable 24V constant voltage (SELV)
- Efficacy of up to 150lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80/90
- RGBW available

### Options

- For length suffix in mm ie 2.4m /2400
- For 2700K suffix /2
- For 3000K suffix /3
- For 4000K suffix /4
- For 6500K suffix /6
- For IP67 suffix /IP67
- For DALI dimmable suffix /DIM

i.e. LDT/12/2400/4/DIM =

Led Tape 2.4m, 1200 lumens per meter, 4000K, DALI Dimmable

Part No.	Lm	W	Lm/W	CRI
LDT/6	600	3.8	146	80
LDT/12	1200	7.4	150	80
LDT/18	1800	11.3	147	80

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)