





TR2 LED

Emergency Downlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

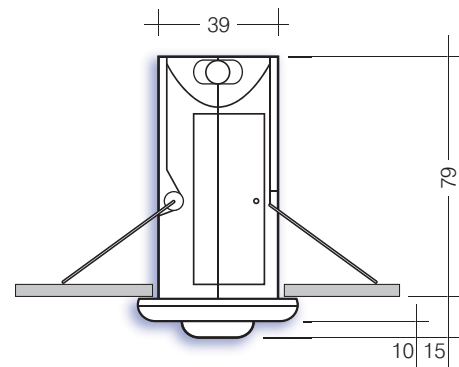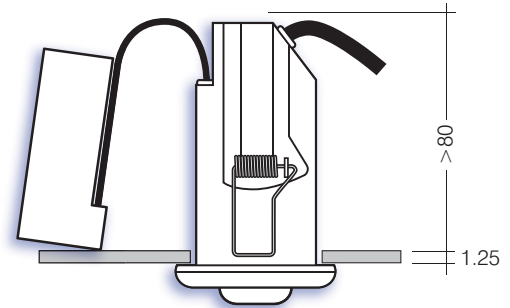

Options

For Open Area Optic suffix /OA

For Corridor Area Optic suffix /CO

For Narrow Optic suffix /NA


i.e. TR2/3/NM/DALI/OA

TR2 LED emergency, Non-maintained, DALI addressable c/w Open Area Optic.


Key Features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 109lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

Corridor



Spot



Open Area

