


External Lighting

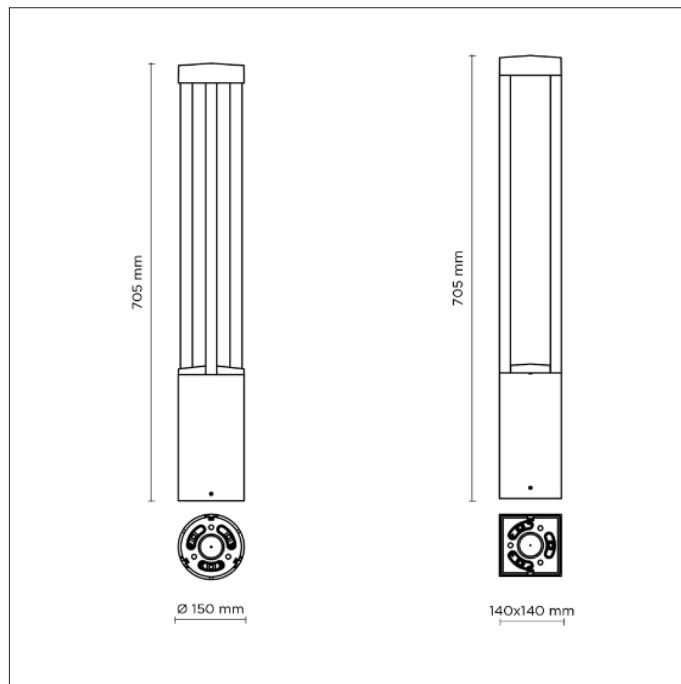

Key Features

- IP66 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam
- Comes in heights of either 700mm or 1000mm

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **SETH/C/3100/4/BLK** =
Seth, Circle, 3100lm, 4000k, Black.

Accessories

- Root Attachment **/SEC/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
SETH/C/3100/4	26	3100	4000k	80	6.5kg
SETH/S/3100/4	26	3100	4000k	80	6.8kg

For more information, please contact Sales@ldl.lighting

