


Indoor Lighting

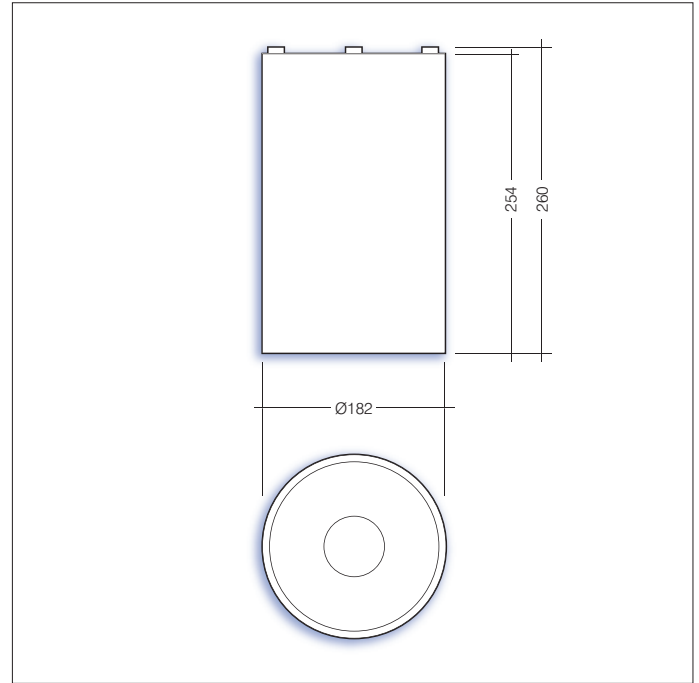

Key features

- IP20 suitable for internal environments
- Impact rating of IK05
- Efficacy of up to 109lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 275
- Manufactured using Tridonic components
- Weight = 1.5 kg

Options

- For 3000k suffix /3
- For DALI dimmable suffix /DIM
- For switch dimmable suffix /MDIM
- For Casambi enabled suffix /CAS
- For 3hr self-contained emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr self-contained DALI emergency suffix /EMP

i.e. **DOM/W/2200/4/DIM/EMR**

= Dominique suspended downlighter, wide 90° reflector, 2196 lumens, 4000K, DALI dimmable c/w 3hr self-contained emergency


Accessories

- For 2m suspension kit **DOM/WIRE**
- For 5m suspension kit **DOM/WIRE/5**

Part No.	Beam angle	W	Lm	lm/W	CCT
DOM/N/1090/4	60°	12	1092	95	4000k
DOM/N/1580/4	60°	17	1576	93	4000k
DOM/N/2020/4	60°	22	2024	92	4000k
DOM/W/1260/4	90°	12	1258	109	4000k
DOM/W/1740/4	90°	17	1741	103	4000k
DOM/W/2200/4	90°	22	2196	99	4000k

For more information, please contact Sales@ldl.lighting

Narrow 60°

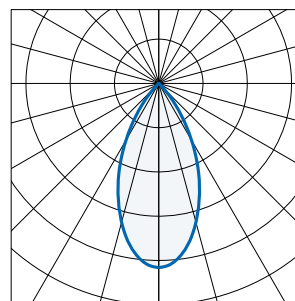

Wide 90°

