


Indoor Lighting

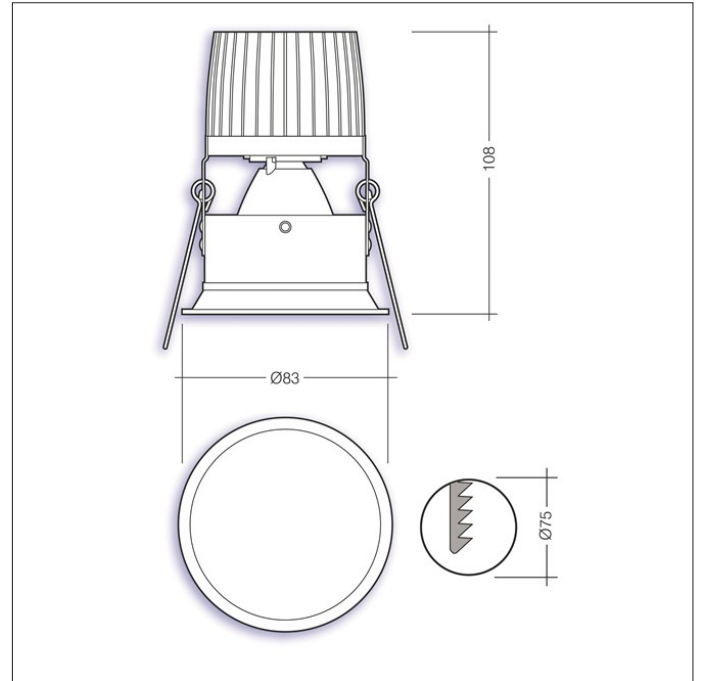

Key features

- IP20
- Impact rating of IK04
- Efficacy of up to 115lm/W
- Nominal life-time of >50,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 304 lm

Options

- For a black finish suffix: /BLK
- For a white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For leading/trailing edge dimmable suffix: /MDIM
- For 3hr emergency suffix: /EMR
- For self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP


i.e. RUB/1170/30/4/WHI/CAS =
Ruby downlight, 1169 lumens, 10W, 30°, 4000K, white bezel & Casambi enabled.

CRI > 80 supplied as standard, CRI > 90 available on request.

Part No.	Lm	W	Lm/W	Beam	CCT
RUB/1050/30/2	1052	10	104	30°	2700K
RUB/1080/30/3	1080	10	107	30°	3000K
RUB/1170/30/4	1169	10	115	30°	4000K
RUB/1020/40/2	1017	10	100	40°	2700K
RUB/1040/40/3	1042	10	103	40°	3000K
RUB/1120/40/4	1125	10	111	40°	4000K

For more information, please contact Sales@ldl.lighting

30° reflector

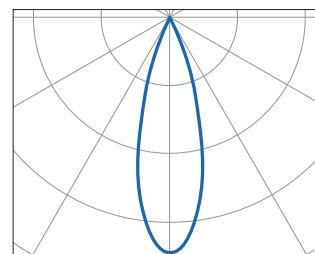

40° reflector

