


Outdoor Lighting

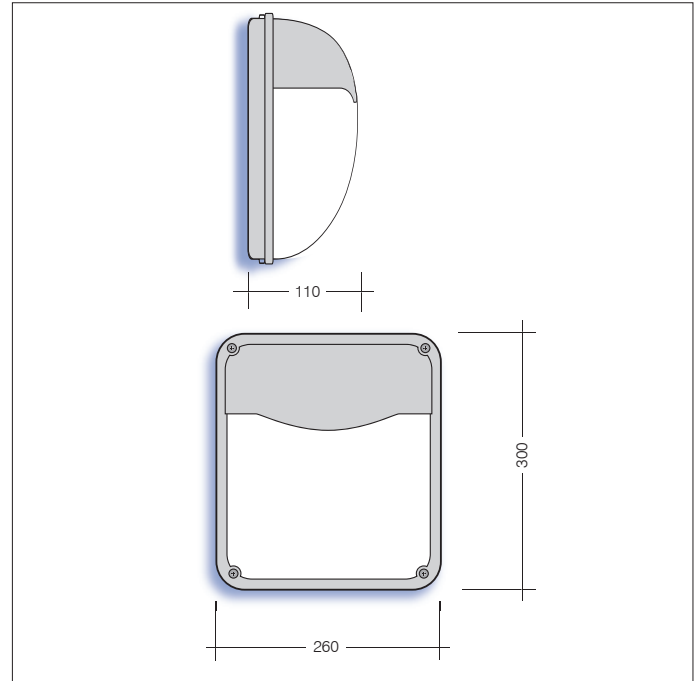

Key features

- IP65 suitable for external environments
- Impact rating of IK06
- Efficacy of up to 128lm/W
- Nominal life-time of 81,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 276lm
- Die cast base

Options

- For DALI dimmable option suffix **/DIM**
- For 10% corridor function suffix **/COR**
- For integral sensor suffix **/SEN**
- For 3hr self-contained emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For DALI addressable emergency suffix **/EMP**

i.e. **WLE/2210/4/ST** =
WLE wallpack, 2210lm, 21W, 4000K, self-test emergency

Part No.	Lm	W	Lm/W	CCT
WLE/1100/4	1286	10	105	4000K
WLE/1560/4	1561	14	112	4000K
WLE/2210/4	2210	21	107	4000K

For more information, please contact Sales@ldl.lighting

