


External Lighting

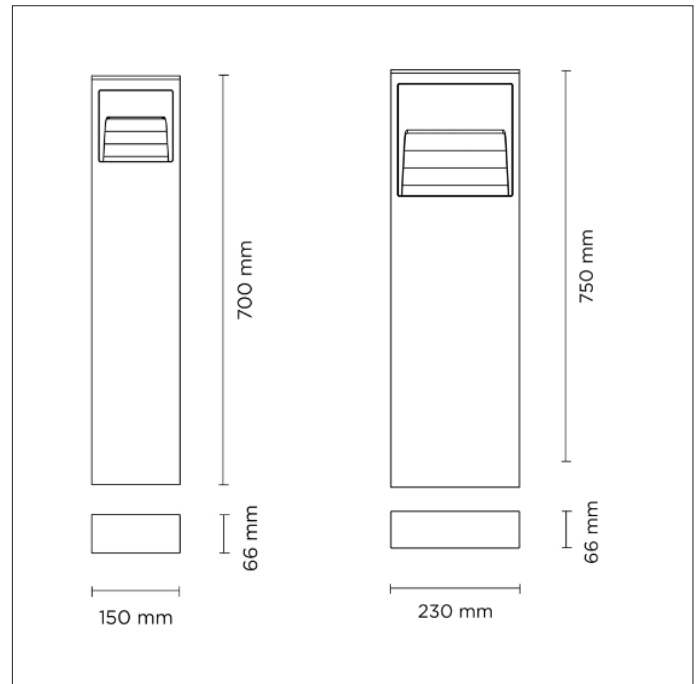

Key Features

- IP65 suitable for external environments
- Impact rating of IK08
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **SET/MINI/360/4/BLK** = Set, 360lm, 4k, Black.

Accessories

- Root Attachment **/BOU/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
SET/MINI/360/4	4	360	4000k	80	4.5kg
SET/MED/665/4	8	665	4000k	80	7.0kg

For more information, please contact Sales@ldl.lighting

