


Indoor Lighting

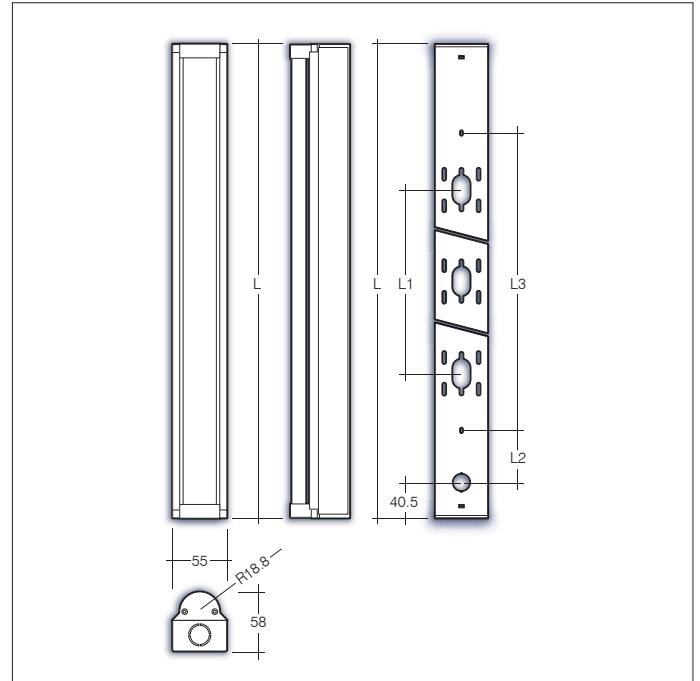

### Key Features

- IP40 suitable for indoor environments
- Impact rating of IK06
- Efficacy of up to 144lm/W
- Nominal life-time of > 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 315 lm

### Options

- 4000K as standard for 3000K suffix /3
- For DALI dimmable suffix /DIM
- For 3hr self-contained emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr self-contained DALI emergency suffix /EMP

i.e. **BAN/5/3431/4/DIM/EMR =**

Banda 5ft batten, 3431 lumens, 4000K, Dali dimmable c/w 3hr self-contained emergency

| Part No.      | W  | Lm   | Lm/W | CCT  | Weight |
|---------------|----|------|------|------|--------|
| BAN/4/2084/84 | 14 | 2084 | 144  | 4000 | 1kg    |
| BAN/4/2745/84 | 19 | 2745 | 141  | 4000 | 2kg    |
| BAN/4/3392/84 | 24 | 3392 | 138  | 4000 | 2kg    |
| BAN/5/3431/84 | 26 | 3431 | 131  | 4000 | 1.5kg  |
| BAN/5/4239/84 | 33 | 4239 | 128  | 4000 | 1.5kg  |
| BAN/5/5810/84 | 47 | 5810 | 123  | 4000 | 1.5kg  |

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

| Fixings (mm) | L    | L1  | L2  | L3    |
|--------------|------|-----|-----|-------|
| 1200mm       | 1200 | 610 | 800 | 159.5 |
| 1500mm       | 1500 | 610 | 840 | 289.5 |

