




# Street Medium Post Top

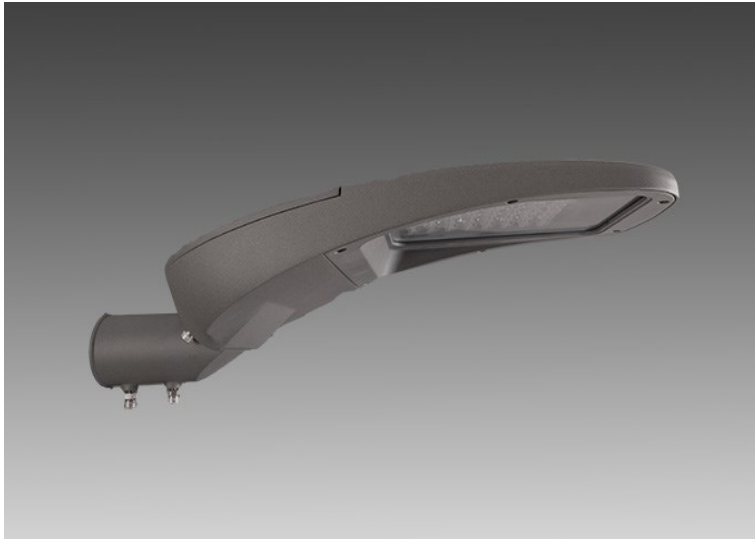

- Efficacies up to 146 lm/W
- Impact rating of IK08
- Nominal life of 102,000 hours (L90, B10)
- IP66 Suitable for external environments
- Operating Temperature from -40 to +50°
- Installation Height 6-8m
- Net Weight 5.5kg
- 4000K as standard
- Spigot size—Ø 60mm

## To Specify:

Select Part Number with additional options if required

AS1 Lens	Lm	W	Lm/W	CCT
ST/M/AS1/3916/4	3916	26	146	4000K
ST/M/AS1/5477/4	5477	38	142	4000K
ST/M/AS1/6549/4	6549	46	141	4000K
ST/M/AS1/7406/4	7406	54	136	4000K

AS2 Lens	Lm	W	Lm/W	CCT
ST/M/AS2/3683/4	3683	26	137	4000K
ST/M/AS2/5116/4	5116	38	133	4000K
ST/M/AS2/6056/4	6056	46	131	4000K
ST/M/AS2/6964/4	6964	54	128	4000K

AREA Lens	Lm	W	Lm/W	CCT
ST/M/AREA/4797/4	4797	26	179	4000K
ST/M/AREA/6662/4	6662	38	173	4000K
ST/M/AREA/7917/4	7917	46	171	4000K
ST/M/AREA/9119/4	9119	54	167	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

