


Indoor Lighting

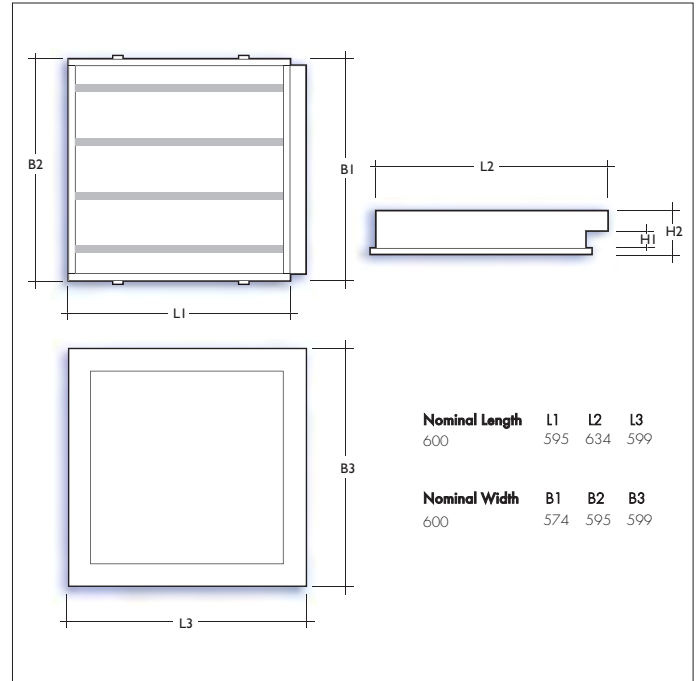

Key Features

- IP65 suitable for indoor environments
- Efficacy of up to 139lm/W
- Nominal life-time of > 60,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80

Options

- For 3000K suffix: /3
- For 4000K suffix: /4
- For TP(a) prismatic suffix: /MP
- For TP(a) opal suffix: /OP
- For rapid fix frame suffix: /RF
- For DALI dimmable suffix: /DIM
- For 3hr emergency suffix: /EMR
- For self-test suffix: /ST
- For addressable emergency suffix: /EMP

Concealed fix options are also available for various ceiling types on request

i.e. **ISA/OP/4828/4/ST=**
Isaac 600x600, 4828 Lumens, 36W, Opal Diffuser c/w Self-test Emergency.

Part No.	Lm	W	Lm/W
ISA/OP/2952	2952	21	139
ISA/OP/3924	3924	28	137
ISA/OP/4828	4828	36	134
ISA/OP/5753	5753	43	132
ISA/MP/2792	2792	21	131
ISA/MP/3712	3712	28	130
ISA/MP/4567	4567	36	127
ISA/MP/5442	5442	43	125

For more information, please contact Sales@ldl.lighting

