

Street - Small


Post Top

Innovation.
Collaboration.
Illumination.



Key Features


- IP66 suitable for external environments
- Efficacy of up to 93lm/W
- Nominal life time of > 50,000 h
- Color rendering index of CRI > 70
- Temperature of Working Condition -40-50°C
- Humidity of Working Condition - 20%-90%RH
- Spigot size - ϕ 50mm
- Installation Height - 3-6m
- Net Weight - 3kg
- Colour temperature 4000K as standard

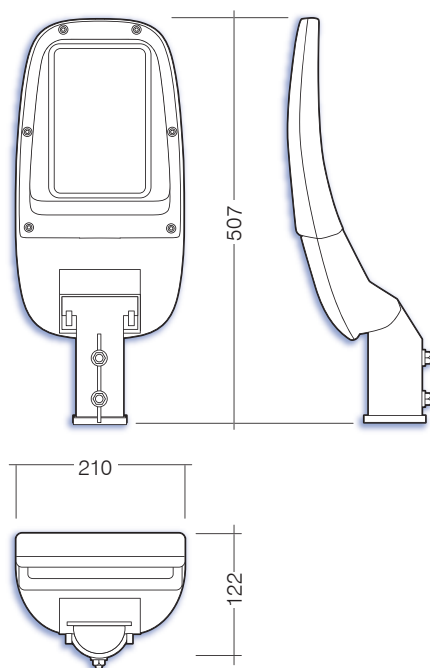

Street - Small


Post Top

Innovation.
Collaboration.
Illumination.

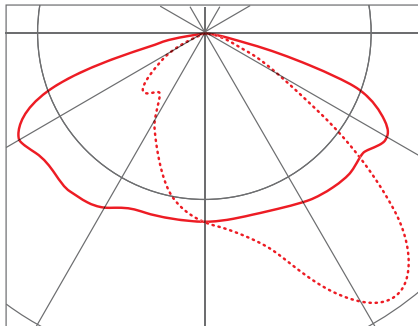


L1 STANDARD LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/S/L1/1400/74	1445	16	89
ST/S/L1/2300/74	2314	26	88
ST/S/L1/3000/74	3013	37	82

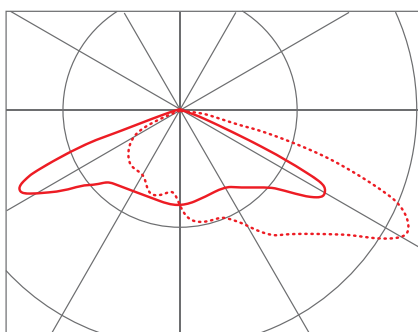


L2 WIDE LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/S/L2/1400/74	1363	16	84
ST/S/L2/2200/74	2190	26	84
ST/S/L2/2800/74	2846	37	78

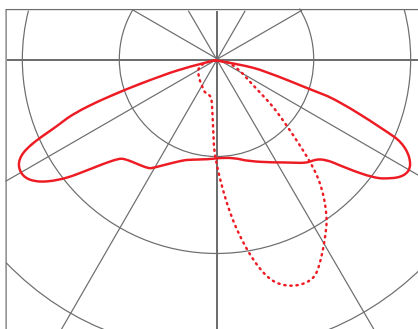


L3 STREET LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/S/L3/1500/74	1489	16	92
ST/S/L3/2400/74	2431	26	93
ST/S/L3/3300/74	3276	37	90

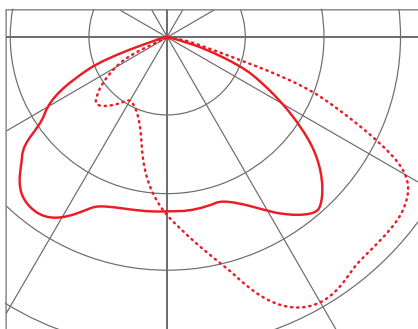

L4 FLOOD LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/S/L4/1600/74	1643	16	101
ST/S/L4/2600/74	2581	26	99
ST/S/L4/3300/74	3338	37	91

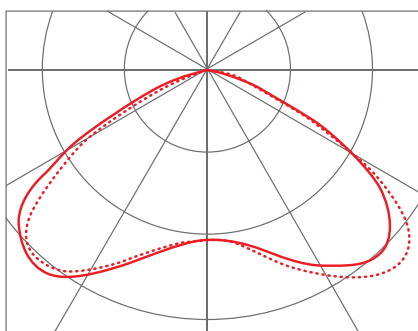

L5 CIRCULAR LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/S/L5/1700/74	1681	16	104
ST/S/L5/2600/74	2639	26	101
ST/S/L5/3500/74	3473	37	95