
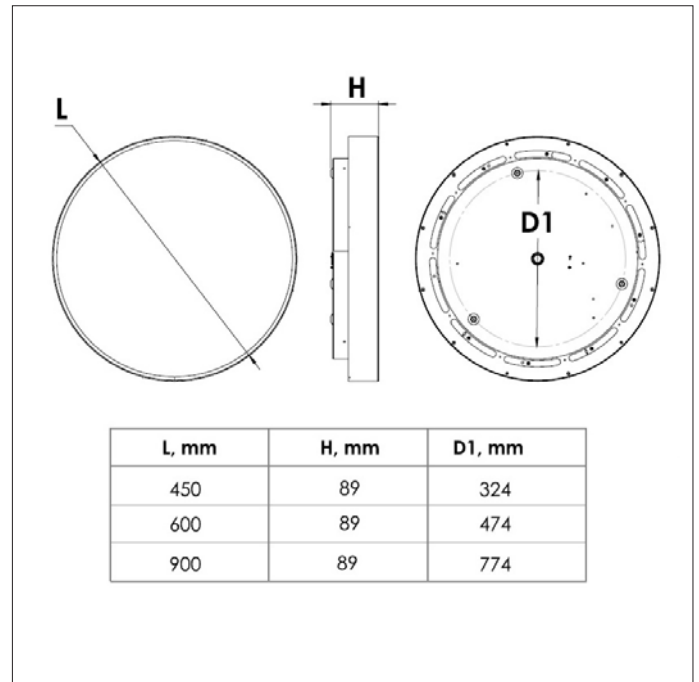


Indoor Lighting



Overview

The Noma is a high quality feature pendant, made from sheet steel, powder coated in a light grey finish and fitted with an acrylic opal diffuser available in a wide range of sizes.

The luminaire is suitable for suspending on ceilings and walls with an indirect ambient back light.

The range incorporates both a 4000K and a 3000K colour temperature and the various configurations including DALI dimmable Casambi enabled.

The Noma is suitable for a wide range of applications from reception feature lighting to office, education and retail projects.

Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable suffix: /WD
- For 3 hr emergency suffix: /EMR
- For Monitor self-test suffix: /MON
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE
- For wire suspension kit suffix: /SUS

- i.e.: Noma Ø600mm, 53W, 7658lm, 3000K = **NOM/6/7660/3**

Part No.	Lm	W	Lm/W	Weight	CCT	L mm
NOM/4/3650/3	3652	26	141	4.7kg	3000K	450
NOM/4/3820/4	3824	26	151	4.7kg	4000K	450
NOM/4/5100/3	5095	36	142	4.7kg	3000K	450
NOM/4/5330/4	5334	36	152	4.7kg	4000K	450
NOM/6/5480/3	5480	38	145	7.9kg	3000K	600
NOM/6/5740/4	5737	38	155	7.9kg	4000K	600
NOM/6/7660/3	7658	53	146	7.9kg	3000K	600
NOM/6/8020/4	8017	53	156	7.9kg	4000K	600
NOM/9/8740/3	8741	59	147	13.8kg	3000K	900
NOM/9/9150/4	9152	59	158	13.8kg	4000K	900
NOM/9/11690/3	11688	80	147	13.8kg	3000K	900
NOM/9/12240/4	12237	80	157	13.8kg	4000K	900

Key features

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 158lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam