


# Riley LED

## Floodlights

Innovation.  
Collaboration.  
Illumination.



Outdoor Lighting

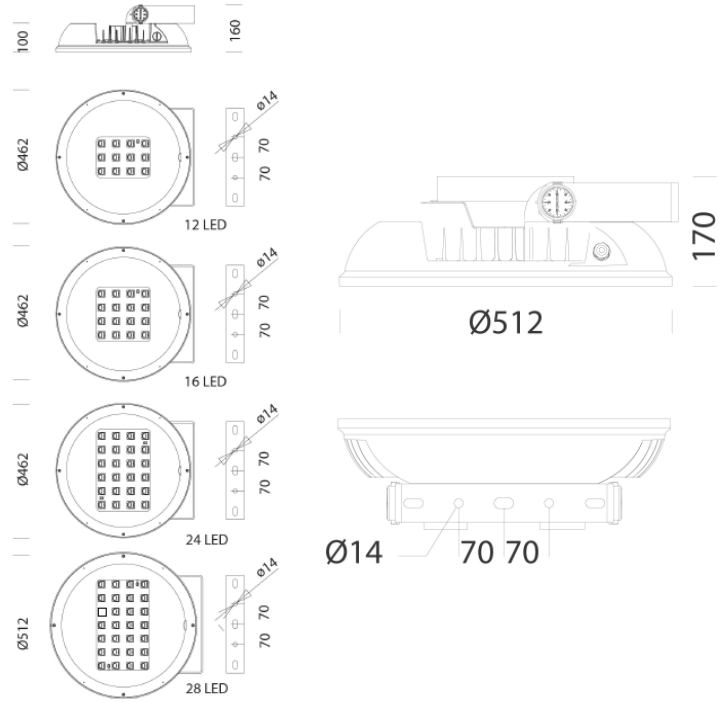

### Key Features

- IP66 suitable for external environments
- Impact rating of IK08
- Nominal life-time of 100,000 h (L90/B10)

### Options

For Graphite suffix /GR

For Sandblasted Silver suffix /SL

For Dimmable suffix /DIM

Please specify Dali or 1-10v

i.e. RL/25954/4/GR

LED floodlight, 25954lm, 4000k, Graphite

Part No.	W	Lm	CCT	CRI	Weight(kg)
RI/9732/4	102	9732	4000k	70	10.5
RI/12976/4	135	12976	4000k	70	9.9
RI/19465/4	202	19465	4000k	70	10.5
RI/25954/4	235	25953	4000k	70	14

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

