
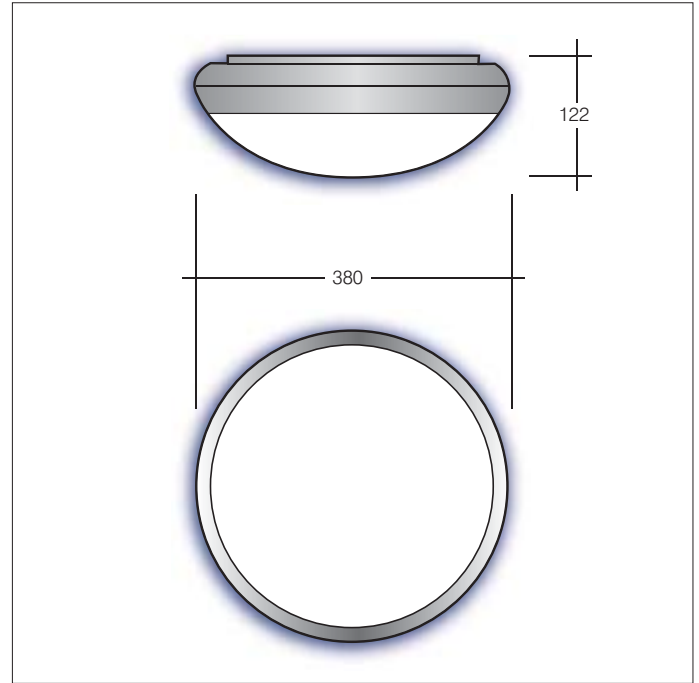


Indoor Lighting

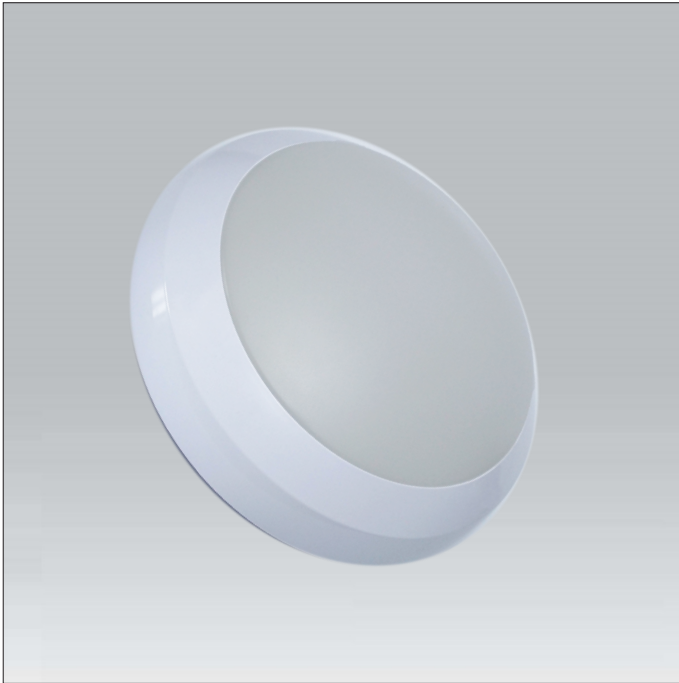

### Key features

- IP65 suitable for external/wet environments
- Impact rating of IK10
- Efficacy of up to 132lm/W
- Nominal life-time of 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 377 lumens

### Options

- For chrome bezel option suffix: /CH
- For brass bezel option suffix: /BR
- For satin silver bezel option suffix: /SS
- For halo effect option suffix: /HA
- For DALI dimmable suffix: /DIM
- For switch dimmable suffix: /SDIM
- For Casambi enabled suffix: /CAS
- For wireless DALI dimmable suffix: /WD
- For 3hr self-contained emergency suffix: /EMR
- For 3hr self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless DALI addressable emergency suffix: /WAE

Lola is supplied with White Bezel as standard

i.e.: Lola bulkhead, 21W, 2616lm, 4000K, white bezel,  
Casambi enabled = **LOL/2620/4/CAS**

Part No.	Lm	W	Lm/W	CCT	Sensor option	Weight
LOL/1750/3	1751	14	125	3000K	N	1.7kg
LOL/1850/4	1845	14	132	4000K	N	1.7kg
LOL/2480/3	2481	21	120	3000K	N	1.7kg
LOL/2620/4	2616	21	127	4000K	N	1.7kg
LOL/2230/3	2231	18	123	3000K	Y	1.9kg
LOL/2330/4	2326	18	128	4000K	Y	1.9kg
LOL/2940/3	2945	25	118	3000K	Y	1.9kg
LOL/3080/4	3080	25	123	4000K	Y	1.9kg

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

### Sensor options

- On-off, no daylight control suffix /F1
- On-off, with daylight control suffix /F2
- Corridor function, no daylight control suffix /F3
- Corridor function, with daylight control suffix /F4
- Dimm to off, no daylight control suffix /F5
- Dimm to off, with daylight control suffix /F6