


Indoor Lighting

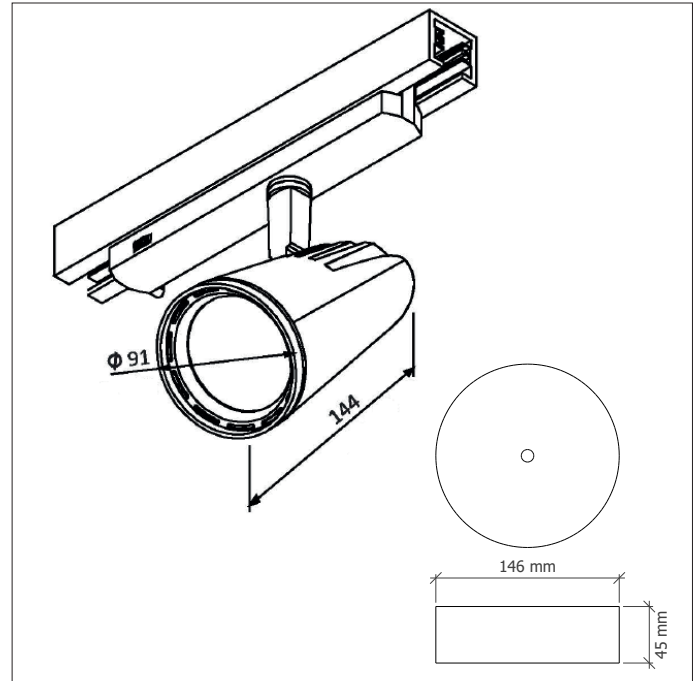

### Key features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 128lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam

### Options

- For 18° reflector suffix: **/18D**
- For 24° reflector suffix: **/24D**
- For 36° reflector suffix: **/36D**
- For 45° reflector suffix: **/45D**
- For 60° reflector suffix: **/60D**
- For 80° reflector suffix: **/80D**
- For black finish suffix: **/BLK**
- For white finish suffix: **/WHI**
- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For Surface mounted: **/SURF**

i.e.: Grace Trackspot, 17W, 2150lm, 4000K, 36° reflector, black finish, Casambi enabled = **GRA/2150/4/36D/BLK/CAS**

CRI 80 as standard, CRI 90 available on request.

White finish as standard, other finishes available on request.

Part No.	Lm	W	Lm/W	Weight	CCT
GRA/1380/3	1376	12	118	0.9kg	3000K
GRA/1600/4	1625	13	125	0.9kg	4000K
GRA/1980/3	1978	17	116	0.9kg	3000K
GRA/2200/4	2273	19	120	0.9kg	4000K
GRA/2680/3	2677	24	115	0.9kg	3000K
GRA/2600/4	2668	24	111	0.9kg	4000K
GRA/3170/3	3168	30	106	0.9kg	3000K
GRA/3440/4	3444	30	115	0.9kg	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)