


### Indoor Lighting

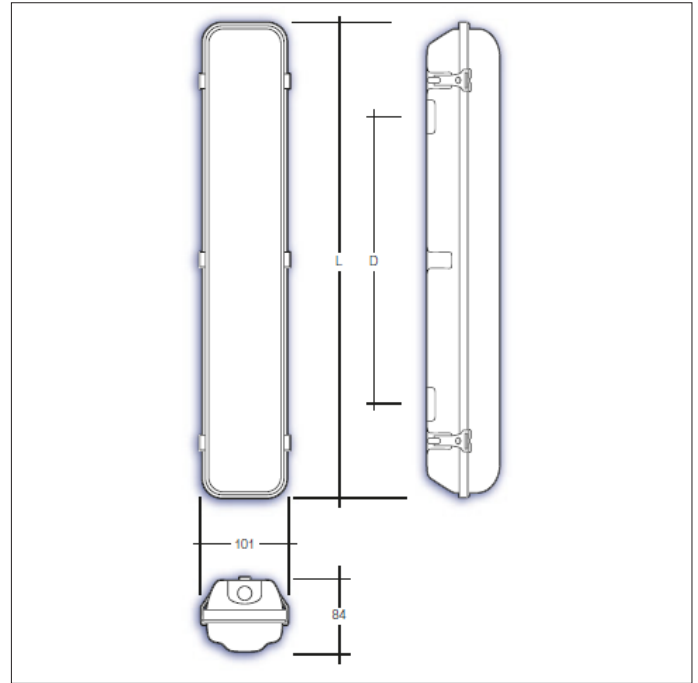

### Key Features

- IP66 suitable for internal environments
- Impact rating of IK08
- Efficacy of up to 152lm/W
- Nominal life-time of 100,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 410lm
- Not suitable for wall mounted external environments

### Options

- For DALI dimmable suffix: /DIM
- For switch dimmable suffix: /SDIM
- For Casambi enabled suffix: /CAS
- For wireless DALI dimmable suffix: /WD
- For Dali dimmable option suffix: /DIM
- For 3hr self-contained emergency suffix: /EMR
- For 3hr self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless DALI addressable emergency suffix: /WAE

i.e. **WPZ/5/4510/4/EMR**

WPZ, 1575mm, 30W, 4512lm, 4000K, 3hr emergency

Part No.	Lm	W	Lm/W	L	D	Weight
WPZ/4/2910/4	2914	20	125	1285	800	2.1kg
WPZ/4/3580/4	3579	25	144	1285	800	2.1kg
WPZ/4/4880/4	4883	34	142	1285	800	2.1kg
WPZ/4/6220/4	6223	45	139	1285	800	2.1kg
WPZ/5/3650/4	3654	24	152	1575	1100	2.5kg
WPZ/5/4510/4	4512	30	149	1575	1100	2.5kg
WPZ/5/6210/4	6211	42	146	1575	1100	2.5kg
WPZ/5/7810/4	7809	55	141	1575	1100	2.5kg

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

