


Indoor Lighting

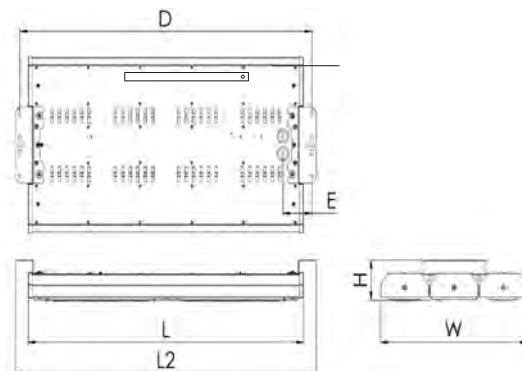

L, mm	W, mm	H, mm	L2, mm	D, mm	E, mm
435	345	78	495	475	62
645			705	685	68
945			1005	985	

Options

For 3000K optic suffix /3

For 4000K optic suffix /4

For 40deg optic suffix /40

For 60deg optic suffix /60

For 75deg optic suffix /75

For 120deg optic suffix /120

For High Rack 30x70deg optic suffix /HR

For DALI dimmable suffix /DIM

For casambi enabled suffix /CAS

For emergency suffix /EMR

For self-test suffix /ST

For addressable Emergency suffix /EMP

i.e. **TRE/2/25400/4/60 =**

Trent Hi Bay 645mm Length, 23660lm, 139W,
4000K c/w 60deg Optics fitted.


Key Features

- IP65 suitable for external environments
- Impact rating of IK08
- Nominal lifetime of > 100,000 h (L80/B10)


Part No.	W	Lm	Lm/W	L	Weight
TRE/1/7160	41	7162	175	435	2.8kg
TRE/1/8130	47	8130	173	435	2.8kg
TRE/1/10030	59	10031	170	435	2.8kg
TRE/1/11830	70	11829	169	435	2.8kg
TRE/1/13640	83	13640	164	435	2.8kg
TRE/2/16260	91	16260	179	645	4.3kg
TRE/2/19960	115	19959	174	645	4.3kg
TRE/2/23660	139	23657	170	645	4.3kg
TRE/2/27140	163	27140	167	645	4.3kg
TRE/3/29780	171	29784	174	945	6.5kg
TRE/3/35300	207	35302	171	945	6.5kg
TRE/3/40500	244	40499	166	945	6.5kg

For more information, please contact Sales@ldl.lighting


High Rack 30°x70°

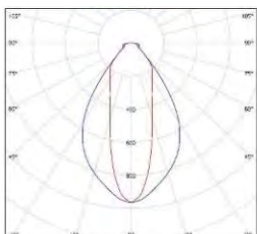


Narrow 40°

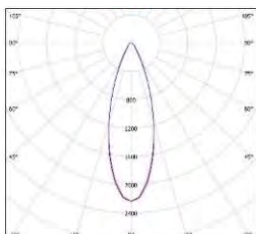

Medium 60°

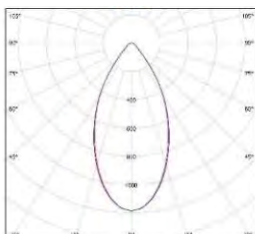

Wide 75°

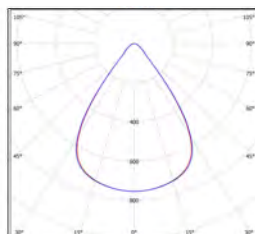

Extra-Wide 120°

