


Indoor Lighting

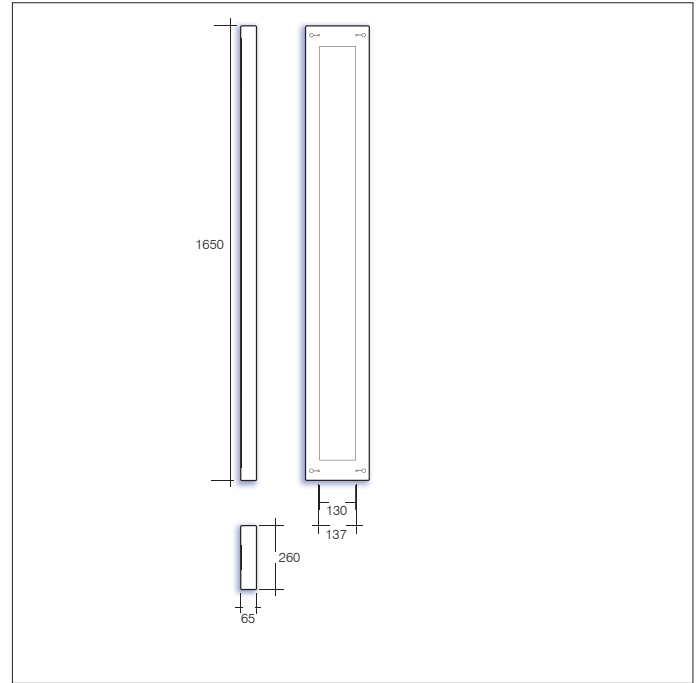

Key Features

- IP20 suitable for indoor environments
- Impact rating of IK06
- Efficacy of up to 118lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 334 lm

Options

- Linear inter-connecting option suffix **/LIN**
- For DALI Dimmable suffix **/DIM**
- For self-contained 3hr emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For DALI em-pro 3hr emergency suffix **/EMP**

i.e. **LUC/4630/4/DIM/EMP =**

Lucie LED Direct/In-direct, suspended luminaire, 4630lm, 4k, DALI Dimmable c/w DALI Em-Pro 3hr emergency

CRI > 80 supplied as standard, CRI > 90 available on request

Part No.	W	Lm	lm/W	CCT	Weight
LUC/3200/4	30	3200	107	4000	4000
LUC/3630/4	32	3630	113	4000	4000
LUC/4063/4	35	4063	116	4000	4000
LUC/4506/4	38	4506	118	4000	4000
LUC/5593/4	51	5593	110	4000	4000

For more information, please contact Sales@ldl.lighting

