


Post Top

Innovation. Collaboration. Illumination.



Outdoor Lighting



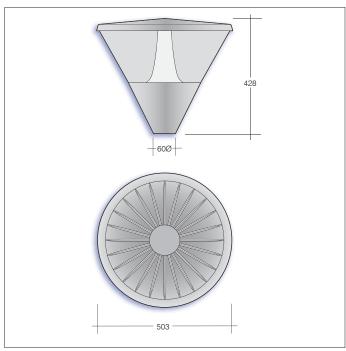

Key features

- 1P65 suitable for external environments
- Impact rating of IKO8
- Nominal life-time of 100,000 h (L80/B10)
- Class II fixture
- Operating temp: -20°C +40°C

120°	180°	120°
105°		105°
90°		90°
75°		75°
60°		60°
45°		45°
30	0° 15° 0° 15° 30°	

Part No.	Lm	W	ССТ	Weight
CLE/1903/4	1903	13	4000k	3kg
CLE/5539/4	5539	49	4000k	6kg
CLE/8390/4	8387	77	4000k	6kg

For more information, please contact Sales@ldl.lighting