


Indoor Lighting

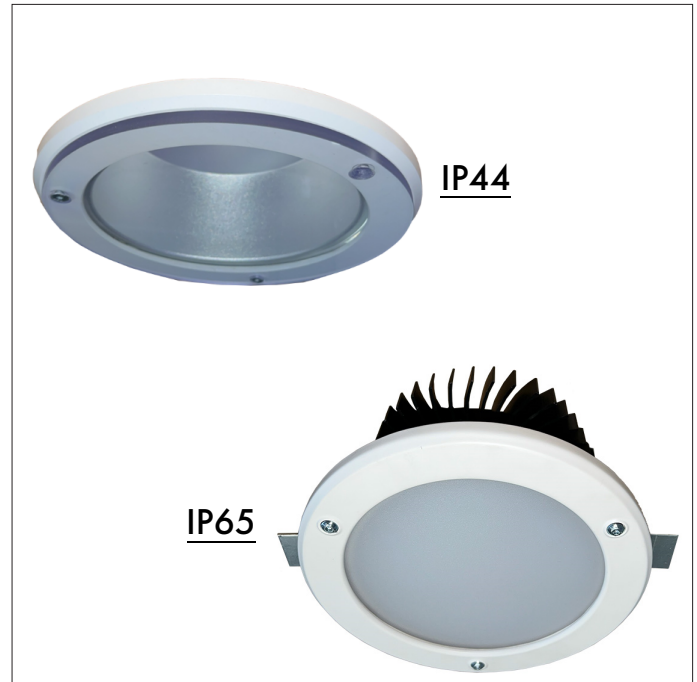

Key features

- IP20/IP44/IP65 suitable for internal/external environments
- Impact rating of IK02-IK10
- Efficacy of up to 130lm/W
- Nominal life-time of >50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 360 lm

Options

- For IP65 suffix **/IP65**
- For IP44 suffix **/IP44**
- For DALI dimmable suffix **/DIM**
- For Tunable White suffix **/TW**
- For Casambi enabled suffix **/CAS**
- For wireless dimmable system suffix **/WD**
- For 3 hr self-contained emergency suffix **/EMR**
- For self-test emergency suffix **/ST**
- For DALI addressable emergency suffix **/EMP**
- For wireless addressable emergency suffix **/WAE**

i.e. **HEN/2000/4/DIM/EMR** = Henry, 2092 lumens, 19W, 4000K, DALI dimmable c/w 3hr emergency

Part No.	Watt	Lm	Lm/W	Weight	A (mm)
HEN/1100/3	10	1080	111	0.8kg	110
HEN/1100/4	10	1117	114	0.8kg	110
HEN/2000/3	19	2015	108	0.8kg	110
HEN/2000/4	19	2092	111	0.8kg	110
HEN/2700/3	22	2675	122	0.9kg	125
HEN/2800/4	22	2819	126	0.9kg	125
HEN/3200/3	26	3154	121	0.9kg	125
HEN/3200/4	27	3269	123	0.9kg	125

For more information, please contact Sales@ldl.lighting